

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 35, Township 141N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 46° 59' 39.590"
 Longitude: 94° 25' 42.030"


On 5-19-88 found a Concrete monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

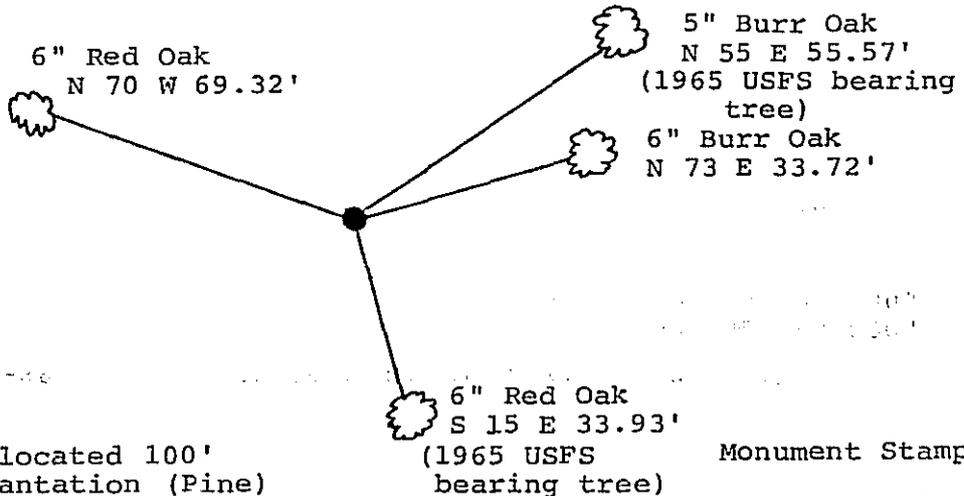

Monument is located 100' easterly of plantation (Pine)
 6' sign post east 10.10'
 8' sign post north 4.10'
 8' sign post south 4.0'

Monument Stamped

T 141 N	R 30 W
S 26	S 25
S 35	S 36
1965	

R.L.S. NO. 6807

Statement of evidence relative to this corner location is on back of page.

310680

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:35 P. M. on the 1 day of March A.D., 1989

County Recorder Claudia Kaylor

By ms, Deputy

DOCUMENT NO. 310680

Statement of Evidence:

Northeast Corner Section 35, Township 141
North, Range 30 West, Cass County, Minnesota

V-21 141-30
Bk.4 Pg.20

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 10 inch Birch South 65 and 1/2 degrees East a distance of 59 links; an 8 inch Maple South 5 degrees West a distance of 34 links; a 5 inch Poplar North 20 degrees East a distance of 48 links; and a 14 inch White Pine North 38 degrees West a distance of 65 links.

1937 Civilian Conservation Corps found a 2 inch capped iron pipe perpetuating the corner position, assumed to have been established by the county surveyor.

1965 U.S. Forest Service records show the following: found a 2 inch capped iron pipe. Set a 6 inch diameter by 5 foot cylindrical concrete monument with 3 inch cap. The following witnesses were set: an 8 inch Oak South 68 degrees East a distance of 53.2 feet; a 5 inch Oak South 15 degrees East a distance of 33.9 feet; a 4 inch Oak North 55 degrees East a distance of 55.6 feet; and a 6 inch Maple North 50 degrees West a distance of 18.4 feet.

1969 U.S. Forest Service Surveyor, Bill Okerman, filed corner certificate using the 1965 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 19 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: Forest Service concrete monument and 2 inch capped iron, 1965 U.S. Forest Service bearing trees: Oak South 15 degrees East, now 6 inches; and Oak North 55 degrees East, now 5 inches. New bearing trees were marked and steel sign post set as shown on front of this certificate.