

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 36, Township 141N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 39.018"
 Longitude: 94° 24' 25.707"


On 5-19-88 found a 2" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

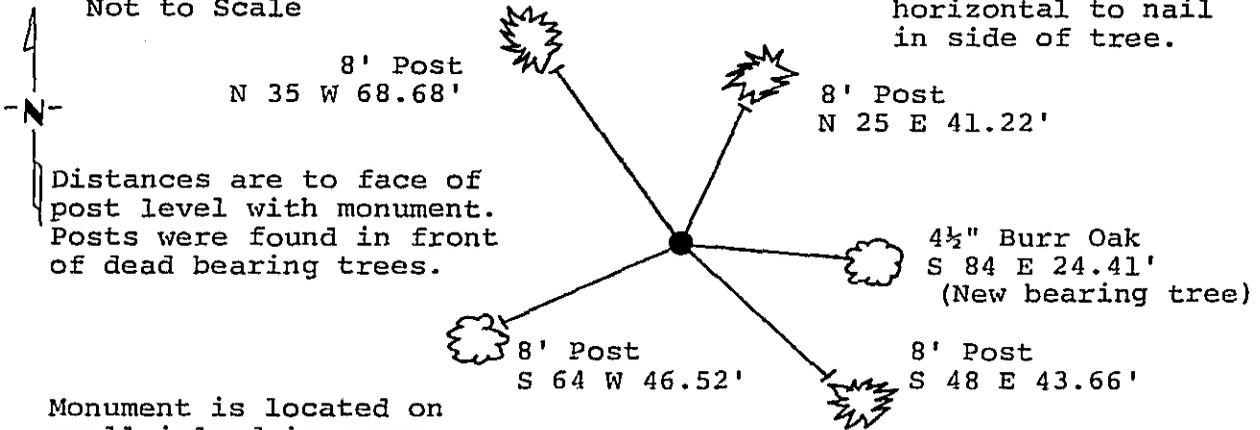

Distances are to face of post level with monument. Posts were found in front of dead bearing trees.

Monument is located on small island in swamp
 8' sign post west 4.15'
 6' sign post south 8.30'
 8' sign post south 4.0'
 Line to standard south & west

Monument Stamped

T 141 N
 R 30 W R 29 W

S 25 | S 30

S 36 | S 31

1965

R.L.S. No. 6807

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 310682

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:45 P. M. on the 1 day of March, A.D., 1989

County Recorder Claudia Kugel
 By Ms, Deputy

DOCUMENT NO. 310682

Statement of Evidence: Northeast Corner Section 36, Township 141
North, Range 30 West, Cass County, Minnesota

V-25 141-30
Bk.4 Pg.8

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the East township line of Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch Poplar North 47 and 1/2 degrees East a distance of 40 links; a 14 inch Yellow Pine North 50 degrees West a distance of 56 links; a 12 inch Yellow Pine South 30 degrees West a distance of 60 links; and a 11 inch Yellow Pine South 65 degrees East a distance of 20 links.

1965 U.S. Forest Service found a 2 inch capped iron pipe perpetuating this corner location. Alongside found iron they set a 2 inch iron pipe with a marked brass cap to mark this corner and marked following witnesses: a 19 inch Norway Pine North 25 degrees East 43.3 feet; a 17 inch Norway Pine North 35 degrees West a distance of 72.6 feet; a 13 inch Jack Pine South 48 degrees East a distance of 46.2 feet; and a 9 inch Aspen South 64 degrees West a distance of 47.7 feet. Set a 6 foot steel sign post South 8.3 feet.

1969 U.S. Forest Service Surveyor Bill Okerman filed corner certificate using 1965 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 19 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: Forest Service brass cap monument and 2 inch County capped iron pipe alongside. All 1965 bearing trees are now dead. Steel sign post had been placed in front of 1965 marked trees to further witness the corner. No trees other than shown were alive or big enough to mark as new bearing trees, so steel posts were utilized as noted. New bearing tree was marked, measurements taken to existing steel sign posts in front of old bearing trees and steel sign posts set as shown on front of this certificate.