

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 26, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 00' 31.359"
 Longitude: 94° 25' 42.609"

On 9/12/88 found a Old Government Bearing Trees.
DATE

left monument as found, lowered monument, removed monument (explain)

On 9/8/88 placed a 2 inch by 54 inch Iron Monument with Brass
DATE
Cap.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail
 Not to Scale in side of tree.

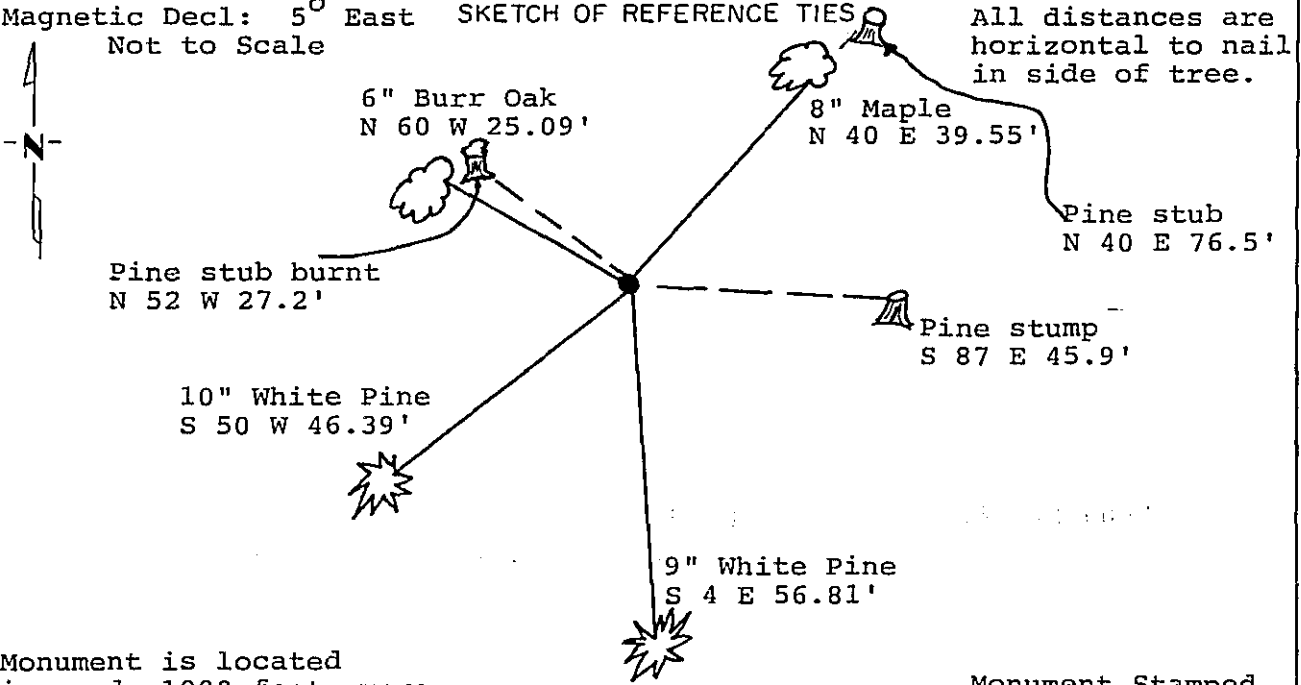

Monument is located in woods 1000 feet, more or less, Southerly of Forest Service Trail Number 3792 and Southerly of small pond. 8 foot sign post North 5.0 feet.

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped
 T 141 N R 30 W
 S 23 S 24
 S 26 S 25
 1988
 RLS No. 17008

Statement of evidence relative to this corner location is on back of page. 310866

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/10/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:00 P.M. on the 14 day of March A.D., 1989

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 310866

Statement of Evidence:

Northeast Corner Section 26, Township 141 North,
Range 30 West, Cass County, Minnesota

R-21 141-30
Bk.5 Pg.50

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 24 inch White Pine North 54 degrees West a distance of 39 links; a 24 inch Yellow Pine South 87 degrees East a distance of 68 links; an 18 inch Yellow Pine North 46 degrees East a distance of 39 links; and an 18 inch Yellow Pine South 19 degrees West a distance of 76 links.

1964 U.S. Forest Service records show the following: technician Ekstrom found two stumps that checked fairly close to the original bearing trees. Notes also show a close check to the original measurement to pond to the North.

1986 U.S. Forest Service records show the following: technicians could not put together 3 or 4 stumps to fit with the original notes, many burned pine stumps in the area.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-S392-8-219. This target allowed for the search and location of this corner.

1988 on August 12 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: several burnt pine stubs and stumps, no scribing found. Dug for post from 3 possible stumps no post found. Location for corner from the 3 stumps was determined, this position then fit with the call to swamp North as noted in the original survey.

1988 on September 7 a Landecker-Stevenson & Associates crew set a 2 by 54 inch iron pipe with brass cap and plastic base with magnet from the 3 Pine remains accepted as the original bearing tree remains. The position fits well with the measurement North to the pond. New bearing trees were marked as shown and steel sign post set as noted on front of this certificate. Bearing tree locations were noted in relationship to corner set as follows: a burnt Pine stub North 52 degrees West a distance of 27.2 feet; a Pine stump South 87 degrees East a distance of 45.9 feet; and a Pine stump North 40 degrees East a distance of 76.5 feet.