

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner of Section 26, Township 141N, Range 28W; 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 10-31-88 found a 1918 GIO 1" x 36" iron pipe with brass cap  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Monument marked

### SKETCH OF REFERENCE TIES

Not to scale

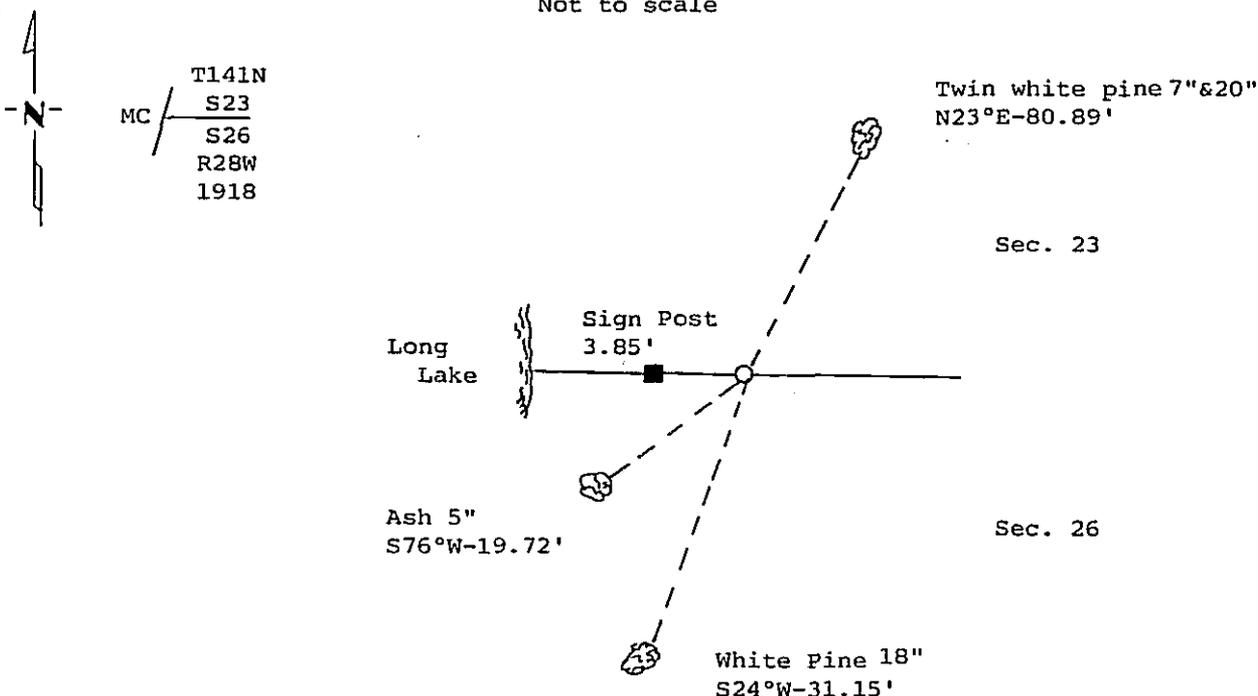

Bearings Magnetic

All trees scribed, painted with a 30d  
spike in side and USFS 54-3 tag

Statement of evidence relative to this corner location is on back of page.

310947

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osypow

Date 3/17/89 Registration No. 12767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:30 A. .M. on the 17 day of March A.D., 1989

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 310947

Statement of Evidence:

R-19,20 MC Sections 23 & 26 (East Side)

- 1874 P.H. Conger set post for corner and the following references:  
W. Pine 18" bears N 49 degrees E, 49 Links (32.24 feet)  
Poplar 3" bears S 63 degrees W, 53 Links (34.98 feet)
- 1918 Dependent resurvey by GLO, notes state that original MC position is in Lake. Established new MC and the following references:  
N. Pine 10" bears N 31 degrees E, 160 Links (105.60 feet)  
W. Pine 7" bears S 22 1/4 degrees W, 48 Links ( 31.68 feet)
- 1973 USFS personnel recover 1918 GLO monument and one BT. Left monument as found.  
W. Pine (1918) 14" bears S 22 3/4 degrees W, 31.68 feet rescribed  
W. Pine 12" bears N 30 degrees E, 79.80 feet  
Steel sign post N 88 degrees W, 52.20 feet

A Certificate of Location of Government Corner was filed for record in the office of the Cass County Recorder as Doc. No. 906.

- 12-14-88 Personnel from Kovanen & Osufsen Surveyors find 1918 GLO corner. Left monument as found and add new witness as shown on Certificate.

This position is not a perpetuation of the original GLO corner, but accepted as corner for lack of further evidence.