

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 24, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 01' 23.645"
 Longitude: 94° 25' 02.882"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1/19/89 placed a Aluminum capped monument on 10 feet of
DATE
aluminum rod. (3/4" diameter)

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree.
 Not to Scale

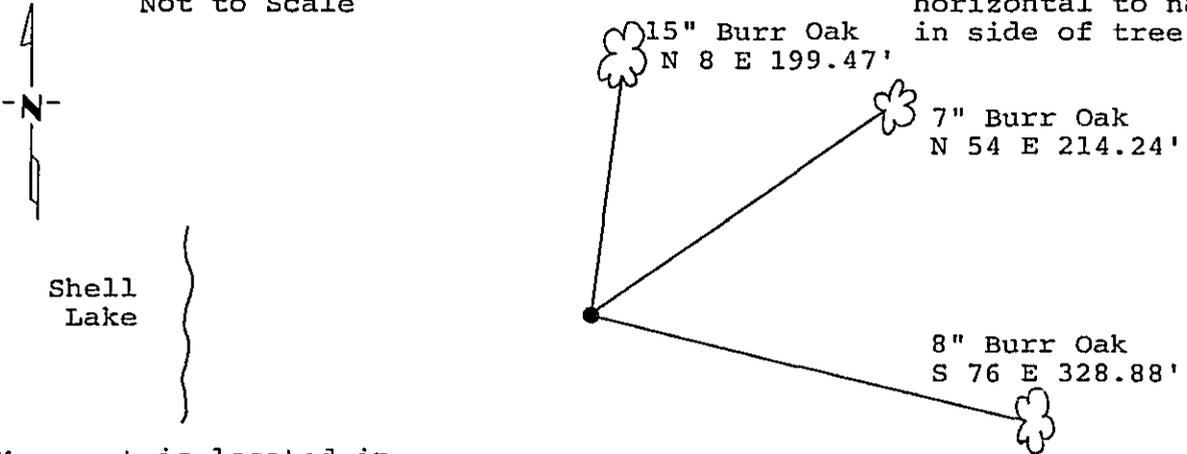

Monument is located in boggy marsh, 900 feet easterly of Shell Lake.
 (2) 8' aluminum sign posts (bolted together) North 2.0'

Monument Stamped
 T 141 N R 30 W
 $\frac{1}{4}$ S13
 $\frac{1}{4}$ S24
 1989
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 311056

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:15 A. M. on the 27 day of March A.D., 1989

County Recorder Clouline Kayler
 By ms, Deputy
 DOCUMENT NO. 311056

Statement of Evidence:

North Quarter Corner Section 24, Township 141
North, Range 30 West, Cass County, Minnesota

N-23 141-30
Bk.5 Pg.41

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Tamarack South 28 degrees West a distance of 14 links; and a 5 inch Tamarack South 1 and 1/2 degrees East a distance of 11 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on August 10 a Landecker-Stevenson & Associates crew searched for the corner. No corner or original evidence was found at this position.

1989 on January 19 a Landecker-Stevenson & Associates crew set a 10 foot aluminum rod, with stamped aluminum cap at the lost, single proportion position between the Northwest and the Northeast corners of Section 24. New bearing trees were marked as shown and two 8 foot aluminum sign posts, bolted together, set as noted on front of this certificate.