

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 24, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 01' 22.543"
 Longitude: 94° 24' 23.338"

On 1/16/89 found a General Land Office brass cap monument.
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

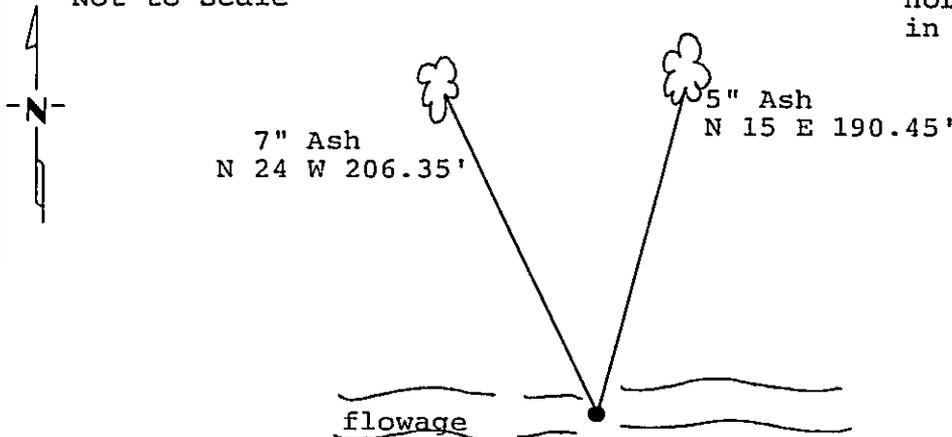

Monument is located in flowage.

- (2) 8' aluminum sign posts (bolted together) South 2.6'
- (2) 8' aluminum sign posts (bolted together) North 2.6'

Monument Stamped
 T141N
 R30W | R29W
 S13 | S18
 S24 | S19
 1918

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

311057

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:20 A.M. on the 27 day of March A.D., 1989

County Recorder Clouline Kayler
 By MS, Deputy

DOCUMENT NO. 311057

Statement of Evidence:

Northeast Corner Section 24, Township 141
North, Range 30 West, Cass County, Minnesota

N-25 141-30
Bk.4 Pg.1-2

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch Tamarack North 66 degrees East a distance of 26 links; a 5 inch Cedar North 67 degrees West a distance of 37 links; a 7 inch Tamarack South 25 degrees West a distance of 18 links; and a 20 inch Cedar South 11 degrees East a distance of 16 links.

1912 County Surveyor's Record Book A page 499 show survey by John Curo. He found all four Government bearing trees and set a 3 by 3 by 36 inch Cedar post.

1917 County Surveyor's Record Book C page 255 show survey by John Curo. He found 3 x 3 x 36 inch post and all four Government bearing trees; Northeast and Southwest are stumps.

1918 U.S. General Land Office dependant resurvey found the corner marked by wood stake, Northeast and Southwest original bearing tree stumps and Southeast and Northwest original bearing trees. A 2 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 10 inch Ash North 5 and 3/4 degrees East a distance of 43 links; an 8 inch Ash South 46 and 1/2 degrees East a distance of 22 links; a 6 inch Cedar South 57 and 1/2 degrees West a distance of 38 links; and a 10 inch Cedar North 77 and 1/4 degrees West a distance of 36 links.

1982 U.S. Forest Service records show the following: found General Land Office 2 inch iron and capped monument with four old post points alongside. Set two 8 foot steel posts to stabilize. No trees near for ties.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1989 on January 16 a Landecker-Stevenson & Associates crew found the 1917 two inch General Land Office brass cap monument between 2 sign posts, 9 inches under ice. New bearing trees were marked to the north as shown on front of this certificate. (No trees were close enough to corner to mark to the south). Two 8 foot aluminum sign posts, bolted together, were set North and South of the corner as noted on front of this certificate.