

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 29, Township 141 N, Range 30 W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 32.833"  
 Longitude: 94° 30' 07.547"

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 10/7/88 placed a 5 foot aluminum rod with an aluminum cap.  
DATE  
(3/4" diameter)

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

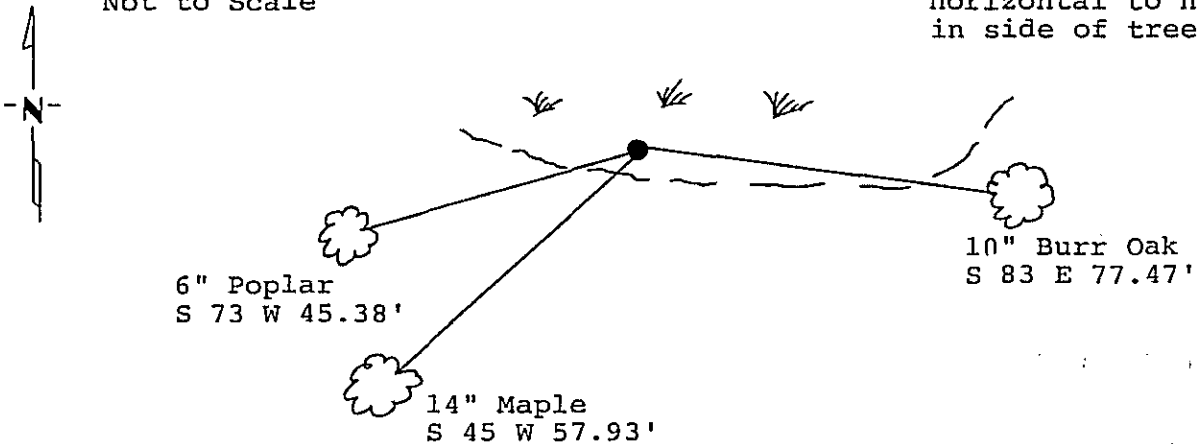

Monument is located 15 feet, more or less, into Cranberry bog and 150 feet, more or less, northerly of Norway Pine Plantation.  
 8' Sign post North 3.0'

Monument Stamped  
 T 141 N R 30 W  
 $\frac{1}{4}$  S 20  
 S 29  
 1988  
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

311064

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 6:55 A.M. on the 27 day of March A.D., 1989  
 County Recorder Claudia Kayler  
 By ms, Deputy.  
 DOCUMENT NO. 311064

Statement of Evidence:

North Quarter Corner Section 29, Township 141  
North, Range 30 West, Cass County, Minnesota

R-7 141-30  
Bk.5 Pg.42

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch Oak North 70 degrees West a distance of 90 links; and a 14 inch Oak South 38 degrees West a distance of 30 links.

1965 U.S. Forest Service technician Ekstrom searched for the corner and found no evidence.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 21 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original Oak Bearing Trees or post. Position falls North 16 feet, more or less, into swamp area.

1988 on October 7 a Landecker-Stevenson & Associates crew set a 5 foot aluminum rod with stamped aluminum cap at the lost, single proportion position between the Northwest and Northeast corners of Section 29. Monumented position is 15 feet North of the south edge of a cranberry bog. New bearing trees were marked as shown and steel sign post set as noted on front of this certificate.