

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander _____ Corner of Sections 23/26, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 29.738"
 Longitude: 94° 26' 53.487"


On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 12/12/88 placed a 2 inch by 48 inch iron pipe with brass cap,
DATE
plastic base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

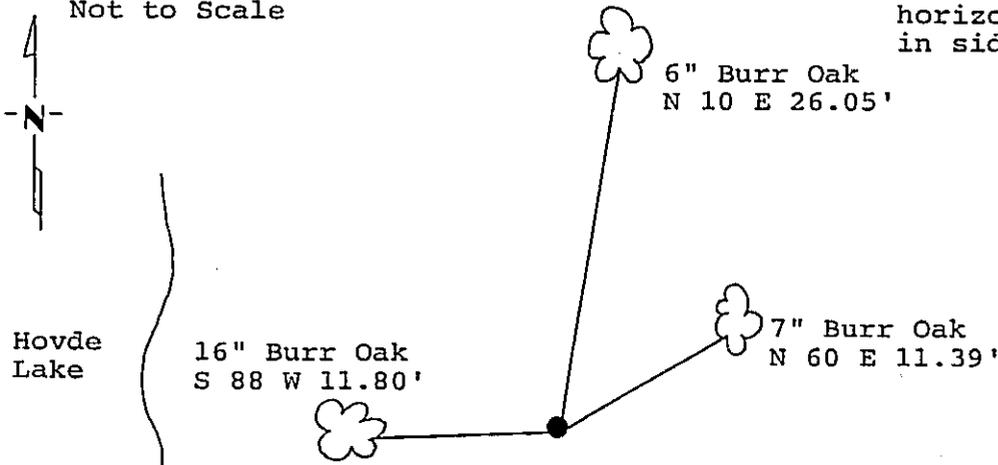

Monument is located on ridge 34 feet easterly of East shore of Hovde Lake. 8' steel sign post North 5.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

MC S23
S26
 1989

RLS 17008

Statement of evidence relative to this corner location is on back of page.

344069

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:20 P.M. on the 27 day of March A.D., 1989

County Recorder Claudine Kayler
 By MS, Deputy

DOCUMENT NO. 344069

Statement of Evidence:

Meander Corner Number 15, Section 23, Township
141 North, Range 30 West, Cass County,
Minnesota

R17-18 141-30
Bk.5 Pg.48

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 18 inch White Pine North 11 degrees East a distance of 56 links; and a 24 inch White Pine South 61 and 1/2 degrees East a distance of 114 links.

1965 U.S. Forest Service technician Ekstrom searched for the corner and found nothing.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on August 25 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: pine stumps in area, however, no evidence proved to be that of the original survey. The corner was determined lost.

1988 on December 12 a Landecker-Stevenson & Associates crew set corner lost at position computed on a mean bearing determined from the north line of Section 23 and the south line of Section 26. The same distance was used as measured in the original General Land Office survey of 1873. All measurements were taken from the southeast corner of Section 23. A 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet was set. New bearing trees were marked as shown on front of this certificate and steel sign post is in place as shown.