

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 28, Township 141N, Range 28W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch: Latitude: 47° 00' 02.874"
 Longitude: 94° 13' 34.024"

On 6-16-88 found a 1" Iron Monument with brass cap (GLO)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree.
 Not to Scale

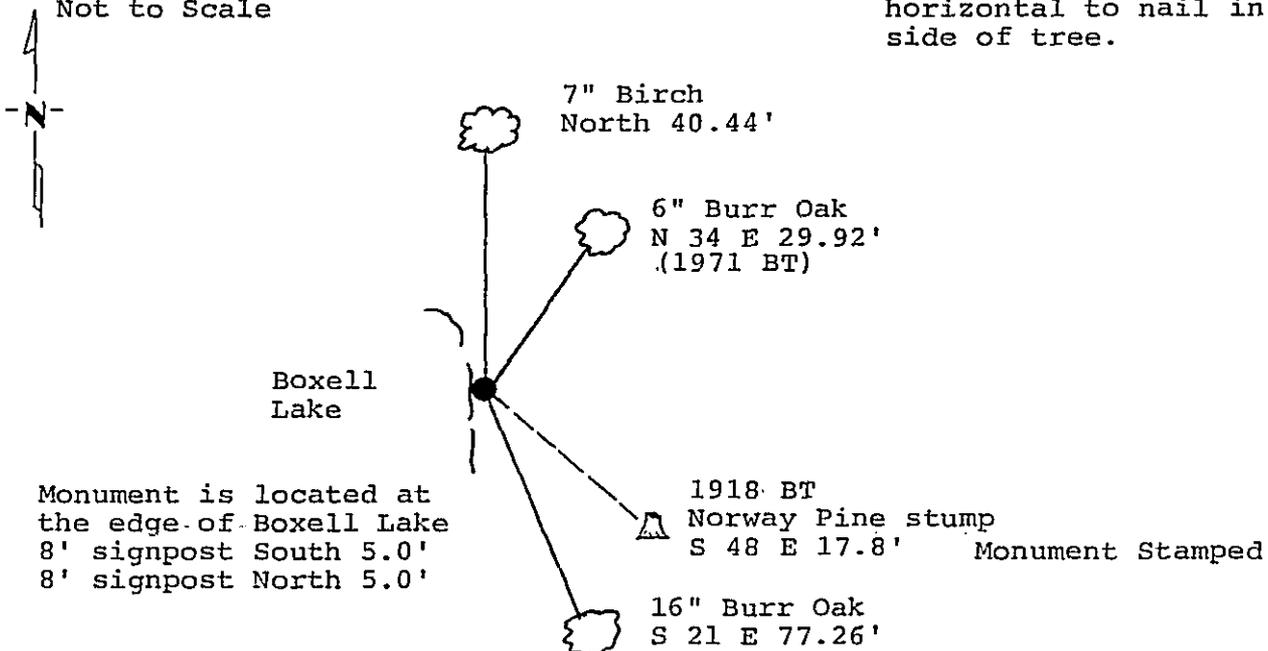

1/4
 S 28 | S 27
 1918

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/31/89 Registration No. 17008

31160
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:10 A .M. on the 3rd day of April A.D., 19 89

County Recorder *Claudine Kaylor*
 By *DJK*, Deputy
 DOCUMENT NO. 31160

Statement of Evidence:

East Quarter Corner Section 28, Township 141 North,
Range 28 West, Cass County, Minnesota

T-13 141-28
Bk.7 Pg.3

1874 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 28 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Poplar North 72 degrees East a distance of 38 links; and a 3 inch Poplar South 61 degrees West a distance of 34 links.

1918 U.S. General Land Office dependant resurvey did not find the original corner and reestablished this corner proportionally as lost. A 1 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 12 inch Norway Pine South 48 and 1/2 degrees East a distance of 27 links; and a 7 inch Red Oak North 11 degrees West a distance of 195 links.

1971 U.S. Forest Service records show the following: found 1918 General Land Office brass cap monument and both 1918 bearing trees. New bearing trees were marked: a 5 inch Oak North 34 degrees East a distance of 30.21 feet; and a 7 inch Birch North 4 degrees East a distance of 30.72 feet.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 16 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 1 inch General Land Office brass cap monument, the 1918 Pine South 48 degrees East is cut off, the 1971 Birch Northeast is cut off and the 1918 Oak is a 10 foot stub North 11 degrees West a distance of 128.7 feet. New bearing trees were marked as shown and steel sign posts are in place as shown on front of this certificate.