

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

STD. SOUTHEAST Corner of Section 36, Township 141 N, Range 28 W, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: $46^{\circ} 58' 38.965''$
Longitude: $94^{\circ} 09' 18.381''$

- On 6/13/88 found a railroad spike set over monumented U.S. Forest Service position. A 6" x 24" concrete monument (USFS)
DATE
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not To Scale

All distances are horizontal to nail in side of tree.

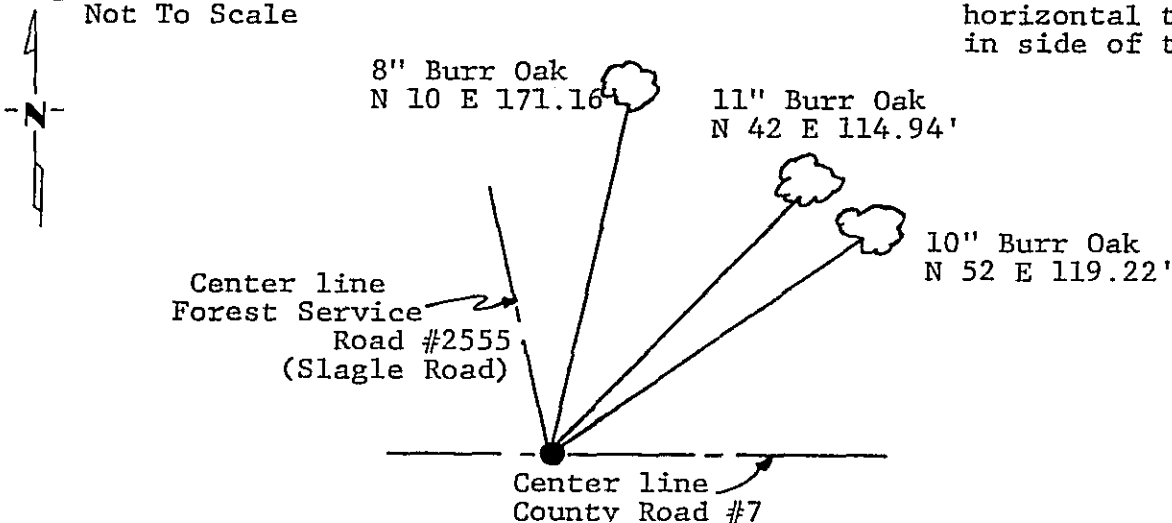

Monument is located in center line of County Road #7 and centerline of Forest Service Road #2555 (Slagle Road) Sign post N 22 E 57.36'

Monument Stamped

SC
T 141 N

R 28 W	R 27 W
S 36	S 31

1969

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

R.L.S. No. 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

 David S. Landecker

Date 3/31/89 Registration No. 17008

31167
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:45 A .M. on the 3rd day of April A.D., 19 89

County Recorder Claudine Kaylor
 By DJK, Deputy

DOCUMENT NO. 31167

Statement of Evidence:

Standard Southeast Corner Section 36, Township
141 North, Range 28 West, Cass County,
Minnesota

Z-25 141-28
Bk.7 Pg.12

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 14 inch Aspen North 10 degrees West a distance of 14 links; and a 7 inch Maple North 40 degrees East a distance of 26 links.

1912 County Surveyor's Record Book A page 519 show survey by A.W. Moulster. He set wood stake from both original bearing tree stumps.

1912 County Surveyor's Record Book B pages 265-269 show survey by John Curo. He found the corner set by Moulster. Marked one new bearing tree: a 15 inch Oak North 22 degrees 13 minutes West a distance of 189.00 feet.

1919 U.S. General Land Office dependant resurvey found the corner marked by a 2 inch galvanized iron pipe set by County Surveyor from original bearing trees. No evidence remains of the original bearing trees. A 2 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 24 inch White Oak North 42 degrees West a distance of 279 links.

1969 U.S. Forest Service set a 6 inch by 24 inch concrete monument with a bronze tablet to mark this corner and the following witnesses: an 8 inch Oak North 34 degrees East a distance of 141.34 feet; and a 6 inch Elm North 46 degrees East a distance of 157.26 feet.

1986 U.S. Forest Service records show the following: found railroad spike set over monumented position as noted in 1969.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 13 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: railroad spike in centerline of County Road Number 7, set over monumented Forest Service corner. New bearing trees were marked as shown and steel sign post is in place as noted on front of this certificate.