

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WITNESS TO
NORTHEAST Corner of Section 25, Township 141N, Range 29W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 00' 38.714"
 Longitude: 94° 17' 07.983"


On 6-7-88 found a 2" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

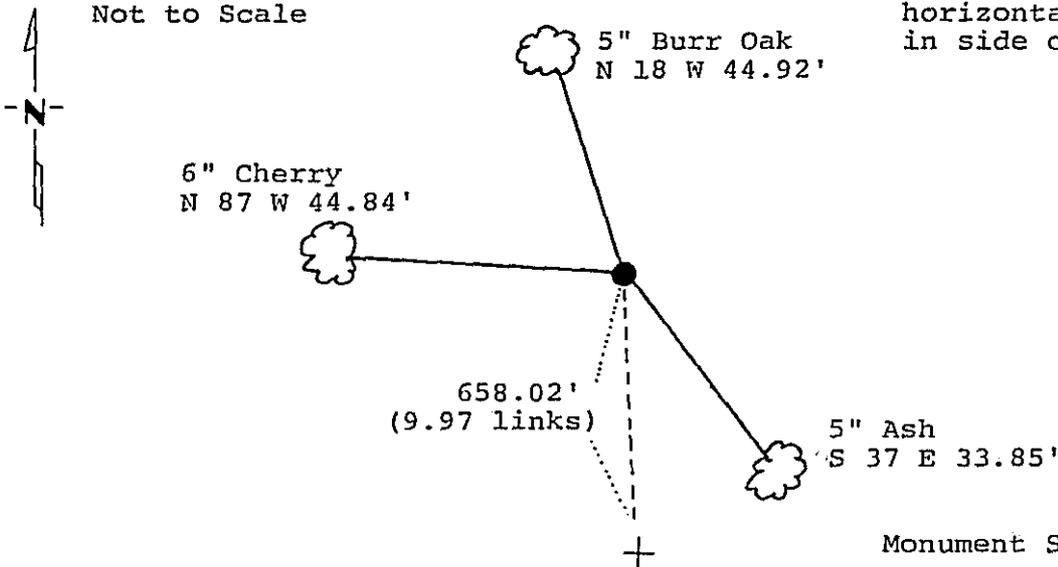

Monument is located 115' south of trail around Silver Lake. Sign post north 5.0'

Section Corner in Silver Lake

Monument Stamped

T 141 N	
R 29 W	R 28 W
S 24	S 19
S 25	S 30
WC	
1918	

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 3/31/89 Registration No. 17008

311169
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:55A .M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor
 By ByK, Deputy

DOCUMENT NO. 311169

Statement of Evidence:

Witness Corner to Northeast Corner Section 25,
Township 141 North, Range 29 West, Cass County,
Minnesota

R-25 141-29
Bk.4 Pg.11

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the East township line of Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 3 inch Poplar South 17 degrees West a distance of 41 links; a 3 inch Poplar South 40 degrees West a distance of 60 links; and a 3 inch Poplar North 70 degrees East a distance of 14 links.

1915 County Surveyor's Record Book B pages 169-177 show survey by John Curo. He set a 2 and 1/2 inch by 48 inch capped iron pipe for witness corner to the section corner and marked the following bearing trees: a 7 inch Poplar North 36 degrees West a distance of 28.50 feet and a 4 inch Poplar North 15 degrees 30 minutes East a distance of 53.86 links.

1918 U.S. General Land Office dependant resurvey found the corner marked by a 2 inch iron pipe for witness corner. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a mound of stone with a 2 foot base 1 and 1/2 feet high West of corner.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 7 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: General Land Office brass cap and County capped iron both in good condition. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.