

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 31, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of \_\_\_\_\_

At the corner location shown on the sketch: Latitude: 46° 59' 36.403"  
 Longitude: 94° 23' 09.730"

On 6/10/88 found a 2" iron monument with a brass cap (USFS)  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East  
 Not to Scale

### SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

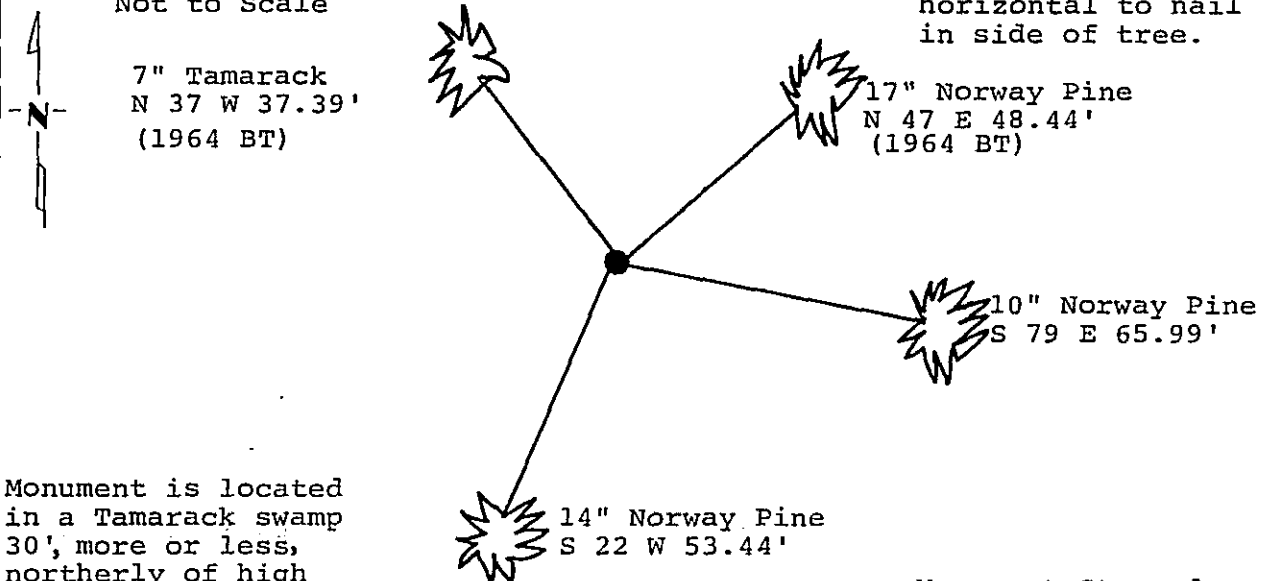

Monument is located in a Tamarack swamp 30', more or less, northerly of high ground. 450' more or less, east of United States Forest Service Road #2110  
 8' sign post south 5.0'  
 6' sign post north 6.9'

Monument Stamped

T 141 N	R 29 W
S 30	S 29
S 31	S 32

1964

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

RLS No. 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota

David S. Landecker  
 David S. Landecker  
 Date 3/31/89 Registration No. 17008

311172

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:10 P. M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor  
 By BjK, Deputy

DOCUMENT NO. 311172

Statement of Evidence:

Northeast Corner Section 31, Township 141  
North, Range 29 West, Cass County, Minnesota

V-5 141-29  
Rk.4 Pg.33

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch White Pine North 78 and 1/2 degrees East a distance of 58 links; a 3 inch Tamarack North 34 degrees West a distance of 17 links; a 4 inch Tamarack South 63 degrees West a distance of 11 links; and a 4 inch Tamarack South 56 degrees East a distance of 20 links.

1964 U.S. Forest Service records show the following: Forest Service personnel found remains of original survey: scribed wood post and decayed stumps of the southwest and southeast bearing trees. Set a 2 inch by 5 foot iron pipe with a 3 inch bronze tablet, a 6 foot steel sign post North 6.8 feet and marked the following bearing trees: a 5 inch Tamarack North 37 degrees West a distance of 37.6 feet; a 5 inch Tamarack South 36 degrees East a distance of 24.4 feet; an 8 inch Tamarack South 11 degrees West a distance of 27.8 feet; and a 15 inch Norway Pine North 47 degrees East a distance of 48.6 feet.

1968 U.S. Forest Service Surveyor Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on June 28, with the Cass County Recorder as certificate Number 494, using 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. The 1964 Southeast and Southwest bearing trees were cut off.

1988 on June 10 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 2 inch brass cap monument up 18 inches in good condition, the 1964 bearing trees are now a 17 inch Norway Pine North 47 degrees East a distance of 48.44 feet and a 7 inch Tamarack North 37 degrees West a distance of 37.39 feet. New bearing trees were marked as shown and steel sign posts in place as noted on front of this certificate.