

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 35, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 13.970"  
 Longitude: 94° 18' 11.180"


On 5/25/88 found a 2 inch iron monument with a brass cap  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree

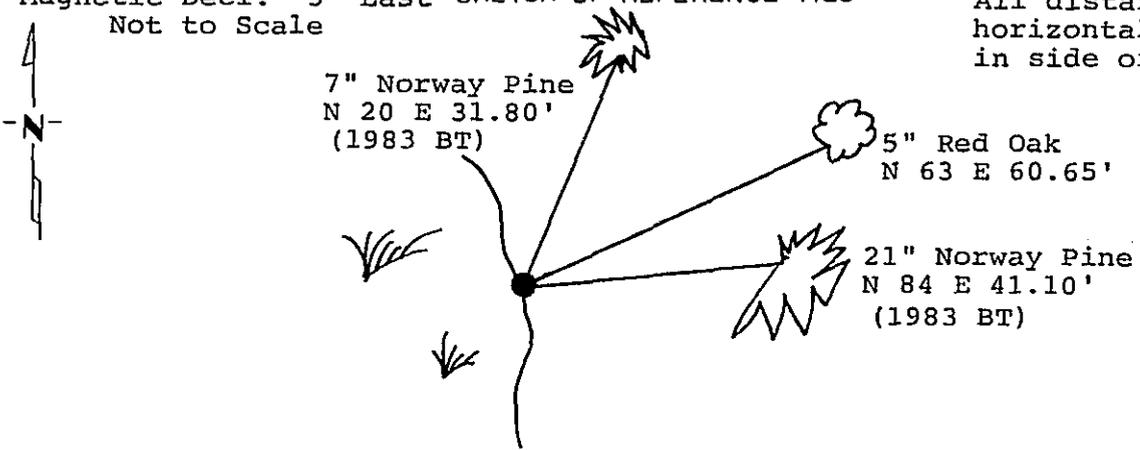

Monument is located on easterly edge of swamp, 150' more or less south of woods trail  
 Sign post south 2.75'

Monument Stamped

T 141 N R 29 W

S 35 <sup>1</sup>/<sub>4</sub> S 36

1983

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

RLS 12684

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 3/31/89 Registration No. 17008

311177

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:35 P.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor  
 By Byk, Deputy  
 DOCUMENT NO. 311177

Statement of Evidence:

East Quarter Corner Section 35, Township 141  
North, Range 29 West, Cass County, Minnesota

X-21 141-29  
Bk.4 Pg.26

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 24 inch White Pine South 80 degrees West a distance of 38 links; and a 6 inch Maple North 40 degrees East a distance of 21 links.

1964 U.S. Forest Service records show the following: James Ekstrom searched for the corner, but found no evidence.

1983 Gary Stevenson, under Forest Service contract, set the corner at the lost position between the Northeast corner of Section 35 and a point reestablished in a pond for the Southeast corner of Section 35. He set a 2 inch by 60 inch iron pipe with brass cap and marked the following bearing trees: a 6 inch Norway Pine North 20 degrees East a distance of 31.94 feet; an 8 inch Birch North 52 degrees East a distance of 41.67 feet; and a 20 inch Norway Pine North 84 degrees East a distance of 41.23 feet. He filed a corner certificate on December 3, 1984 with the Cass County Recorder as document Number 279157.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 25 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument in good condition, the 1983 Birch bearing tree is now a stump, both 1983 Norway Pine bearing trees are in good condition as shown on front of this certificate. A new bearing tree was marked as shown and a steel sign post is in place as noted on front of this certificate.