

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NUMBER 8 MEANDER Corner of Section 35, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 58' 45.989"
 Longitude: 94° 19' 09.921"



On 5/27/88 found a 2 inch iron monument with a brass cap (USFS)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

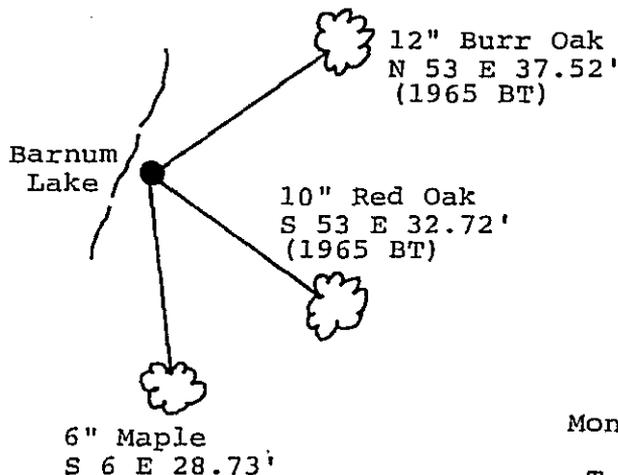

Monument Stamped

T 141 N R 29 W
 MC / S 35
S 2
 T 140 N R 29 W

1965

RLS No. 6807

Monument is located on easterly shore of Barnum Lake, 100' more or less westerly of township road 8' sign post east 5.0'

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/31/89 Registration No. 17008

311179

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:45 P.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor
 By DJK, Deputy

DOCUMENT NO. 311179

Statement of Evidence:

Meander Corner Number 8, Section 35, Township
141 North, Range 29 West, Cass County,
Minnesota

Z 17-18 141-29
Bk.4 Pg.30

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 9 inch White Birch North 40 degrees East a distance of 62 links; and an 18 inch Jack Pine South 82 degrees East a distance of 83 links.

1911 County Surveyor's Record Book A page 483 show survey by H.S. Todd. He found a stake set by Curo and stumps of both original bearing trees. He set a 2 inch by 48 inch capped galvanized iron pipe and marked the following bearing trees: a 2 inch Birch South 68 degrees East a distance of 14 feet; and a 3 inch Birch North 61 degrees East a distance of 25.5 feet.

1915 County Surveyor's Record Book C page 235 show survey by F.A. Donner. He found the iron monument as established in 1911.

1965 U.S. Forest Service records show the following: found a 2 inch capped iron pipe and stump of the original Southeast bearing tree. Set a 2 inch by 5 foot galvanized iron pipe with bronze tablet and new bearing trees were marked: a 10 inch Oak North 53 degrees East a distance of 37.8 feet; and a 6 inch Maple South 53 degrees East a distance of 32.8 feet.

1968 U.S. Forest Service Surveyor, Bill Okerman, Registered Land Surveyor Number 6807, filed a corner certificate on June 28, with the Cass County Recorder as certificate Number 518, using the 1965 information.

1988 on May 27 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument and county capped iron pipe alongside, both in good condition. Both 1965 bearing trees are in good condition, Maple South 53 degrees East is now a 10 inch Red Oak. A new bearing tree was marked as shown and a steel sign post set as noted on front of this certificate.