

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

STD. SOUTHEAST Corner of Section 36, Township 141N, Range 29W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 58' 45.057"  
 Longitude: 94° 16' 53.151"


On 5-25-88 found a Concrete monument with a brass cap and  
county <sup>DATE</sup> capped monument.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

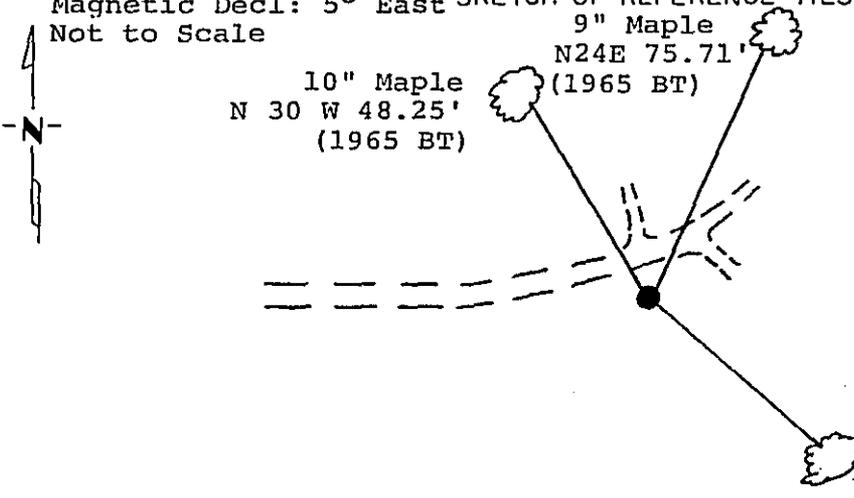

Monument is located  
 20' south of road centerline  
 to Chippewa Lodge  
 8' signpost east 5.0'  
 Power pole northwesterly 4.75'

Monument Stamped

T 141 N  
 R 29 W R 28 W

SC  
S 36 | S 31  
 S1  
 T 140 N, R 29 W  
 R.L.S. NO. 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

*David S. Landecker*  
 David S. Landecker

Date 3/31/89 Registration No. 17008

311180  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:50 P.M. on the 3rd day of April, A.D., 1989

County Recorder Claudine Kaylor

By DJK, Deputy

DOCUMENT NO. 311180

Statement of Evidence:

Standard Southeast Corner Section 36, Township  
141 North, Range 29 West, Cass County,  
Minnesota

Z-25 141-29  
Bk.4 Pg.15

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 20 inch Yellow Pine North 17 degrees West a distance of 54 links; and a 24 inch White Pine North 16 degrees East a distance of 45 links.

1912 County Surveyor's Record Book A pages 556-558 show survey by John Curo. He found stubs of both original bearing trees. Set a 2 and 1/2 by 48 inches galvanized iron pipe with cap.

1915 County Surveyor's Record Book B pages 169-177 show survey by John Curo. He found iron with cap as set in 1912. New bearing trees were marked: a 3 inch Birch North 25 degrees East a distance of 19.14 feet; and a 10 inch Birch stump North 85 degrees West a distance of 3.81 feet.

1918 U.S. General Land Office dependant resurvey found the corner marked by a 2 inch iron pipe and both bearing tree stumps. They did not set a new corner.

1965 U.S. Forest Service records show the following: found a 2 inch iron pipe and 1915 Birch bearing tree Northeast. Set a 6 inch concrete monument with brass cap. New bearing trees marked: 7 inch Maple North 24 degrees East a distance of 75.7 feet; and an 8 inch Maple North 30 degrees West a distance of 48.2 feet.

1967 U.S. Forest Service Surveyor Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on June 28, with the Cass County Recorder as certificate Number 516, using 1965 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 25 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: concrete monument with brass cap and 2 inch capped iron pipe alongside. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.