

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

STANDARD SOUTHEAST Corner of Section 35, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 58' 47.488"
Longitude: 94° 25' 42.765"


On 6/1/88 found a 2" iron monument with a brass cap (USFS)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

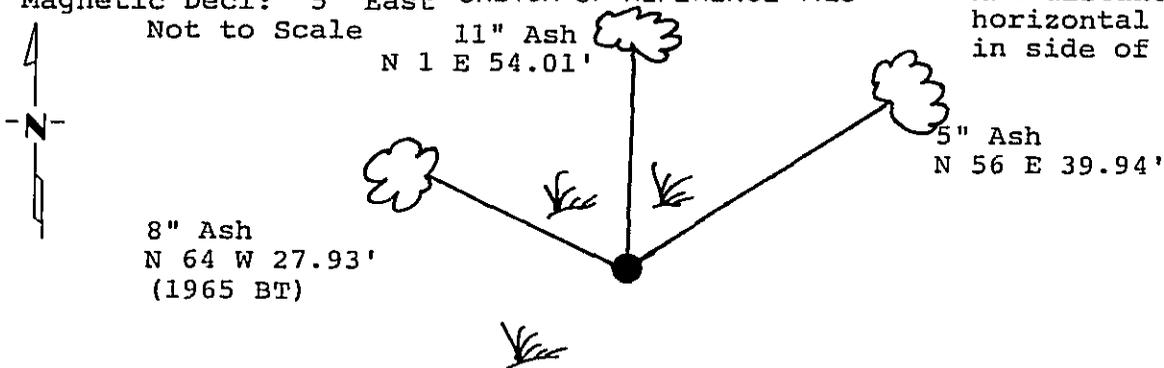

Monument is located in Ash swamp 450' more or less south of road 8' sign post east 5.0'

Monument Stamped

T 141 N R 30 W

S 35 SC S 36

52
T 140 N R 30 W
1965

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

RLS No. 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 3/31/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:35 P.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor
By Bjk, Deputy

DOCUMENT NO. 311189

Statement of Evidence:

Standard Southeast Corner Section 35, Township
141 North, Range 30 West, Cass County,
Minnesota

Z-21 141-30

Bk.4 Pg.27

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch White Pine North 81 degrees West a distance of 77 links; and a 9 inch Ash North 57 degrees East a distance of 15 links.

1965 U.S. Forest Service technician James Ekstrom found the corner monumented with a 2 inch capped iron pipe. Set a 2 inch by 5 foot iron pipe with bronze cap and marked the following bearing trees: a 13 inch Ash North 80 degrees East a distance of 17.7 feet; and a 7 inch Ash North 64 degrees West a distance of 28.0 feet.

1969 U.S. Forest Service Surveyor Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on September 5, with the Cass County Recorder as certificate Number 530, using 1965 information.

1976 Walt Curo, Licensed Land Surveyor Number 11395, plat of DITZLER'S RAINFOREST. Plat shows corner in place.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. The 1965 Northeast bearing trees was cut off.

1988 on June 6 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 2 inch brass cap monument and County capped iron pipe alongside in good condition and 1965 bearing tree now an 8 inch Ash North 64 degrees West a distance of 27.93 feet. Two new bearing trees were marked as shown and steel sign post is in place as noted on front of this certificate.