

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 22 Meander Corner of Sections 32/33, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 35.378"  
 Longitude: 94° 21' 54.179"



On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3/16/89 placed a 2 inch by 54 inch iron pipe with brass cap  
DATE  
and plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

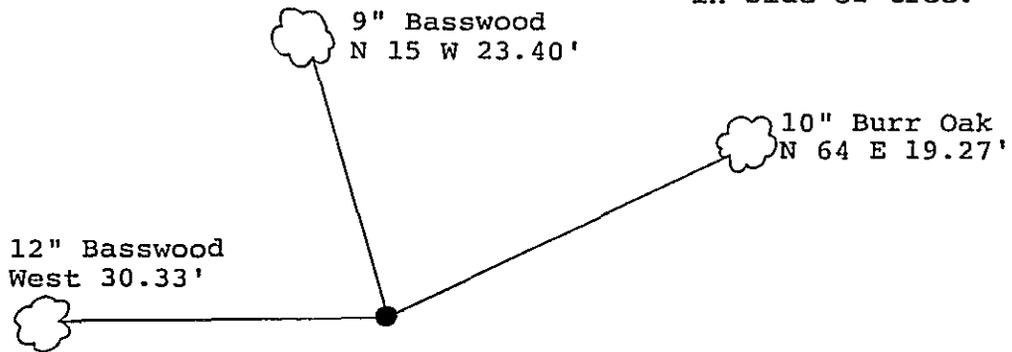

Monument is located  
 55'± Northerly of waters  
 edge of Moccasin Lake.  
 8' steel sign post North 4.0'

Monument Stamped  
 T 141 N R 29 W  
 S32 | S33  
 MC  
 1989  
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

311849

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

*David S. Landecker*

David S. Landecker

Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:57 P. on the 3 day of May A.D., 1989

County Recorder Claudia Kaylor

By MS Deputy

DOCUMENT NO. 311849

Statement of Evidence:

Meander Corner Number 22, Sections 32/33,  
Township 141 North, Range 29 West, Cass County,  
Minnesota

VW-9 141-29  
Bk.4 Pg.67

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch White Oak North 75 degrees East a distance of 32 links; and a 6 inch Poplar South 87 degrees West a distance of 33 links.

1988 on July 7 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original post or accessories.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on March 14 and 16 a Landecker-Stevenson & Associates crew set a 2 inch by 54 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportion position between the Northeast corner of Section 32 and Meander Corner Number 18. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.