

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 12 Meander Corner of Sections 30/31, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 38.068"
Longitude: 94° 23' 58.061"


On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 1/17/89 placed a 2" by 48" iron pipe with brass cap, plastic
DATE
base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

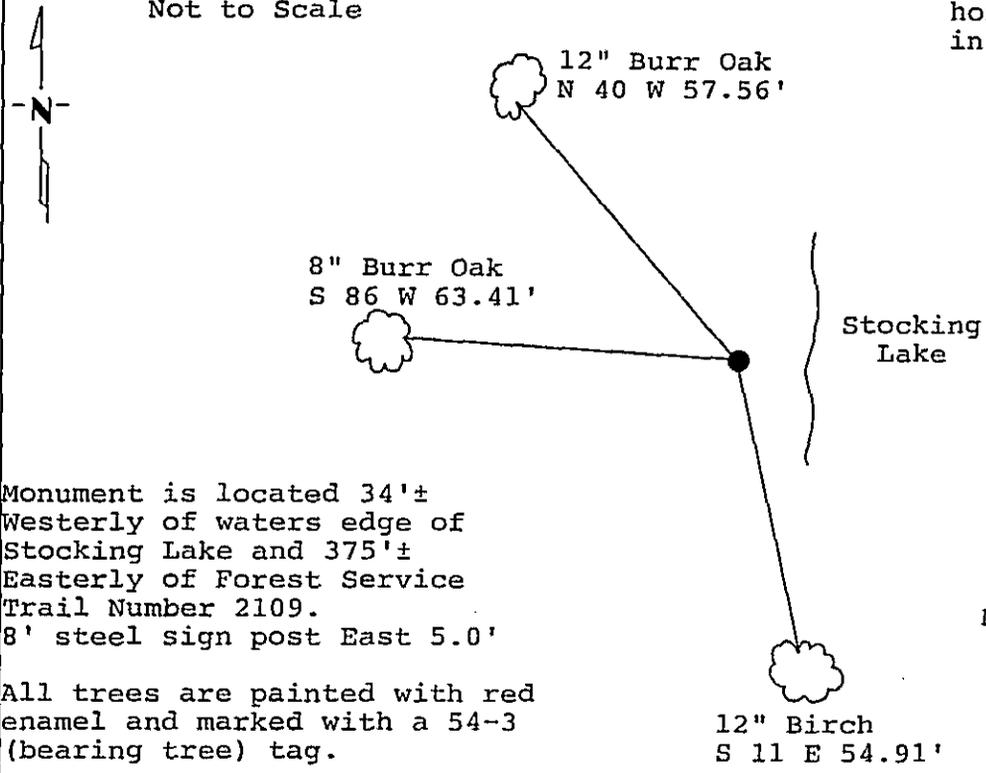

Monument is located 34'±
Westerly of waters edge of
Stocking Lake and 375'±
Easterly of Forest Service
Trail Number 2109.
8' steel sign post East 5.0'

Monument Stamped
T 141 N R 29 W
~~S30~~ MC
~~S31~~
1989
RLS 17008

All trees are painted with red
enamel and marked with a 54-3
(bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 311853

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.
David S. Landecker
David S. Landecker
Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass
I hereby certify that this document was filed in the Co. Recorders office at 4:01 P. M. on the 3 day of May A.D., 1989
County Recorder Candice Kayler
By MS Deputy
DOCUMENT NO. 311853

Statement of Evidence:

Meander Corner Number 12 Sections 30 and 31,
Township 141 North, Range 29 West, Cass County,
Minnesota

V2-3 141-29
Bk.4 Pg.64

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch Yellow Pine North 74 degrees West a distance of 28 links; and an 8 inch Yellow Pine South 61 degrees West a distance of 25 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 7 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: several Pine stumps badly burned North and South of search position, none fit together and no evidence of blazing or scribing. Original corner determined lost.

1989 on January 17 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportion position between the Northwest and Northeast corners of Section 31. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.