

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 26, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

Latitude: 47° 00' 07.777"  
 Longitude: 94° 18' 13.020"

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 2/23/89 placed a 2" by 48" iron pipe with brass cap, plastic  
DATE  
base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

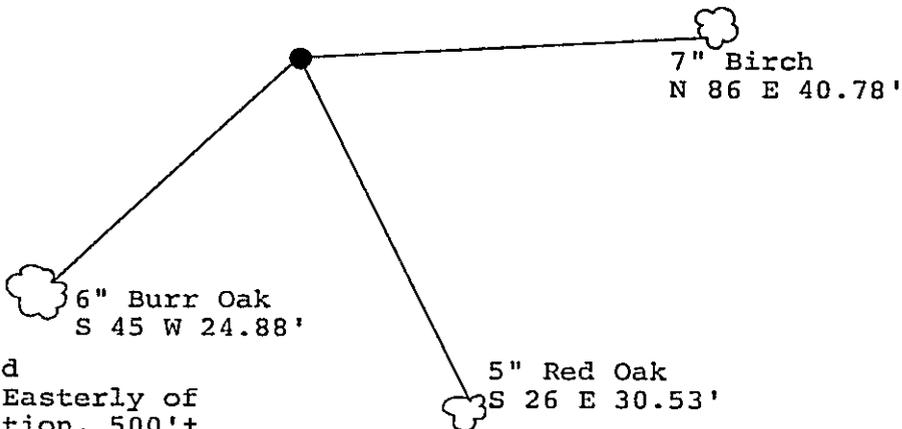

Monument is located in hardwoods 75'± Easterly of Norway Pine plantation, 500'± Westerly of woods trail and 100' Northerly of small swamp. 8' steel sign post North 5.0'

Monument Stamped  
 T141N R29W  
 1/4  
 S26 S25  
 1989  
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

311855

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:03 P.M. on the 3 day of May A.D., 19 89  
 County Recorder Claudia Kayler  
 By MS, Deputy  
 DOCUMENT NO. 311855

Statement of Evidence:

East Quarter Corner Section 26, Township 141  
North, Range 29 West, Cass County, Minnesota

T-21 141-29  
Bk.4 Pg.58

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Poplar South 50 degrees West a distance of 14 links; and a 5 inch Poplar North 70 degrees East a distance of 29 links.

1964 U.S. Forest Service records show the following: technician Ekstrom searched for corner, but found no evidence.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundry Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 8 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original Poplar bearing trees or post.

1989 on February 23 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportion position between the Northeast and Southeast corners of Section 26. New bearing trees were marked as shown and a steel sign post is in place as noted on front of this certificate.