

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 27, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 06.460"
 Longitude: 94° 19' 38.033"


On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/20/89 placed a 2" by 48" iron pipe with brass cap and plastic
DATE
base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

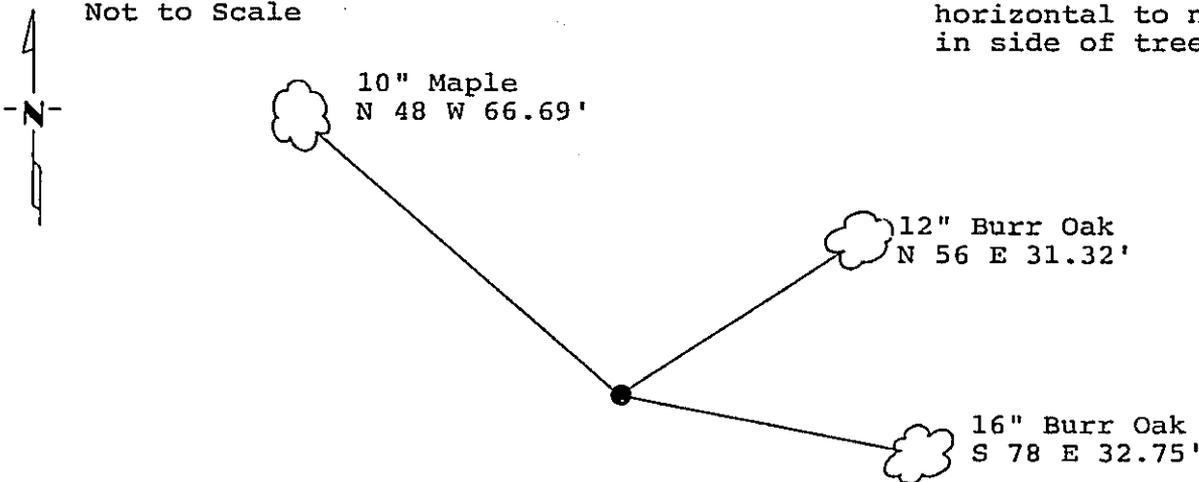

Monument is located on East edge of clearcut 500'± Northerly of Woodtick Trail. 8' steel sign post North 4.0' All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Monument Stamped
 T 141 N R 29 W
 S27+S26
 1989
 RLS 17008

Statement of evidence relative to this corner location is on back of page. 311856

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
 Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:04 P. M. on the 3 day of May A.D., 19 89
 County Recorder Claudine Kayler
 By MS, Deputy
 DOCUMENT NO. 311856

Statement of Evidence:

East Quarter Corner Section 27, Township 141
North, Range 29 West, Cass County, Minnesota

T-17 141-29
Bk.6 Pg.4

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 9 inch Poplar stub North 70 degrees East a distance of 17 links; and a 3 inch Poplar South 41 degrees West a distance of 103 links.

1918 U.S. General Land Office dependent resurvey reestablished this corner proportionally. Notes show there was no evidence of original post or bearing trees. A wood post was set to mark the corner. No new bearing trees were marked.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 9 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original or 1918 General Land Office resurvey post or accessories. This corner was determined lost.

1989 on March 20 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportional position between the Southeast and Northeast corners of Section 27, that being the same position as determined in the 1918 General Land Office resurvey. This position then corresponding to the existing monumentation along the east line of said Section 27 as established in 1918, that being the Northeast and Indian Reservation Boundary Closing Corners. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.