

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 35 Meander Corner of Section 31, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 58' 45.790"  
Longitude: 94° 31' 34.300"


On 8/23/89 found a 2" capped iron pipe.  
DATE

left monument as found,  lowered monument,  removed monument (explain)


On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree.



Ten Mile Lake

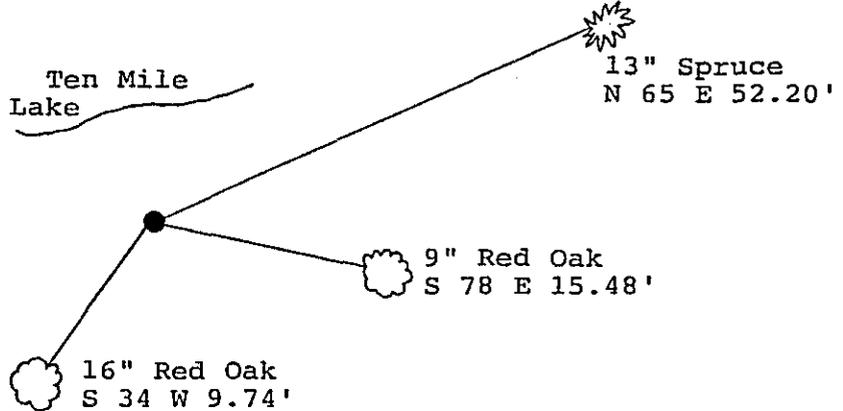

Monument is located 5' ± Southerly of waters edge of Ten Mile Lake.

Monument Stamped

MC/17008

Statement of evidence relative to this corner location is on back of page.

311860

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
David S. Landecker

Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:08 P.M. on the 3 day of May A.D., 1989

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 311860

Statement of Evidence:

Meander Corner Number 35, Section 31, Township  
141 North, Range 30 West, Cass County, Minnesota

Z2-3 141-30  
Bk.5 Pg.69

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch White Pine North 60 degrees East a distance of 7 links; and a 14 inch White Pine South 7 degrees West a distance of 13 links.

1911 County Surveyor's Record Book A pages 385 show survey by John Curo. He found both Government bearing trees and set a wood post. Later in 1911, he removes post and sets a 2 inch by 48 inch iron monument capped on top in bed of cement and rock.

1915 County Surveyor, Frank Donner finds both original bearing tree stumps and the 2 inch by 48 inch iron pipe as set by Curo in 1911.

1923 County resurvey plat in the Cass County Recorders Office, by John Greene. Plat shows the 2 inch by 48 inch iron pipe as set by Curo in 1911.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on August 23 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch capped iron pipe as set in 1911 by John Curo, leaning slightly northwest, near shore. No evidence left of the original bearing trees.

1989 on January 26 a Landecker-Stevenson & Associates crew visited the corner and made ties from the 1911 two inch capped iron pipe. New bearing trees were marked as shown on front of this certificate. The cap was stamped MC, and Registered Land Surveyor Number 17008.