

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 33, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 46° 59' 35.908"

Longitude: 94° 13' 35.037"

On 3/1/89 found a 2" GLO brass cap monument
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES


All distances are horizontal to nail in side of tree.



6" Ash
N 2 W 72.75'

8" Burr Oak
N 25 E 127.39'

13" White Pine
N 58 E 216.98'

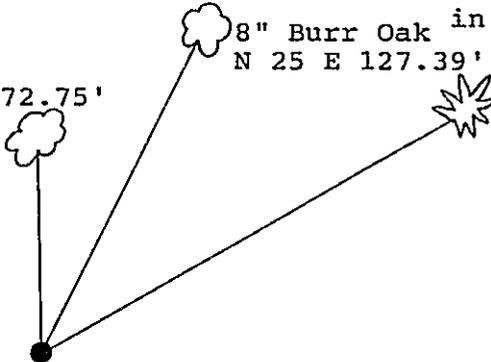

Monument is located in swamp near island Southwest of Nellie Lake.

(2) 8' aluminum sign posts (bolted together) East 1.75'
8' steel sign post on Southeasterly side of monument to stabilize.

Monument Stamped
T 141 N R 28 W
S28 | S27
S33 | S34
1918

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

311942

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 5-1-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 9 day of May A.D., 1989

County Recorder Claudia Kaye
By MS, Deputy

DOCUMENT NO. 311942

Statement of Evidence:

Northeast Corner Section 33, Township 141 North,
Range 28 West, Cass County, Minnesota

V-13 141-28
Bk.7 Pg.47

1874 P. H. Conger, U.S. Deputy Surveyor, did not establish this corner position while subdividing Township 141 North, Range 28 West. The notes indicate that the point for corner falls in pond, therefor unsettable and no bearing trees marked.

1918 U.S. General Land Office dependent resurvey established this corner proportionally and a 2 inch by 36 inch iron pipe with a marked brass cap was set to mark this corner. The following bearing tree was marked: a 7 inch Jack Pine North 22 degrees East a distance of 248 links. 18 inch by 18 inch by 12 inch pits were dug in each section at 5 and 1/2 feet.

1963 George Claydon, plats AUDITORS PLAT OF LONGVILLE. Plat shows corner in place.

1968 County Highway Department information shows, on County Road Number 5, notes 2 inch iron pipe in place.

1986 U.S. Forest Service records show the following: found 2 inch iron pipe with brass cap flush with swamp, remains of 1918 Northeast bearing tree lying down.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1989 on March 1 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: the 2 inch General Land Office brass cap monument, as established in 1918, located in swamp. New bearing trees were marked as shown and (2) aluminum sign posts (bolted together) were set as noted on front of this certificate. 8 foot steel sign post on Southeasterly side of monument to stabilize.