

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Point

West of Quarter Corner of Sections 25/36, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

Latitude: 46° 59' 39.716"

At the corner location shown on the sketch:

Longitude: 94° 10' 34.459"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 2/24/89 placed a 2" by 48" iron pipe with brass cap, plastic  
DATE base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree.

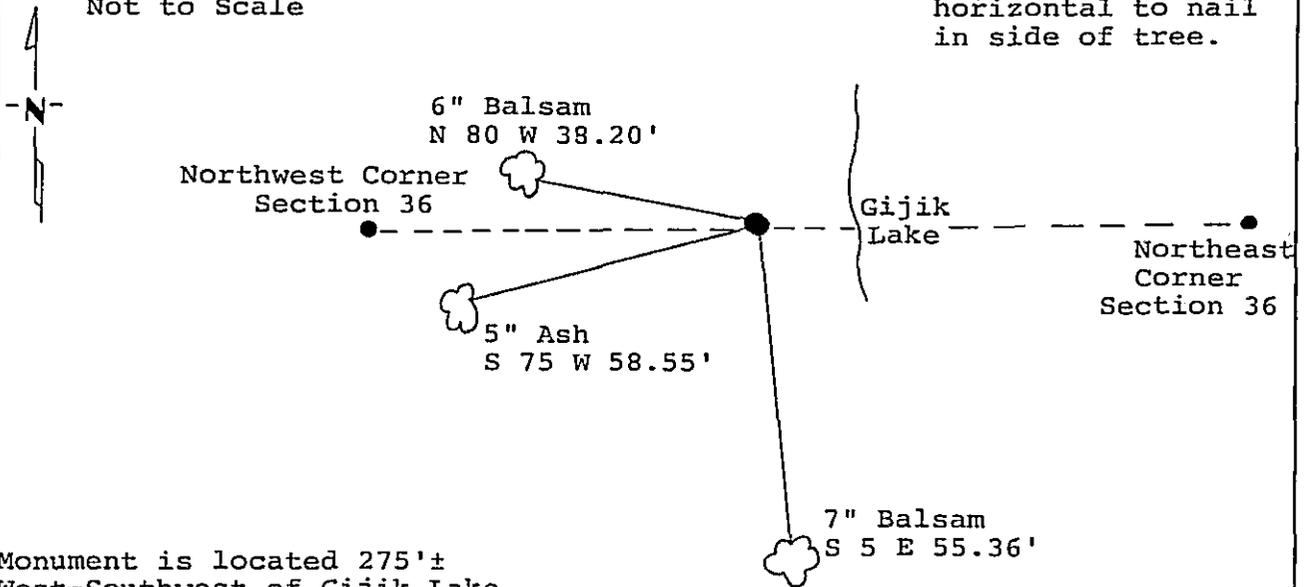

Monument is located 275'± West-Southwest of Gijik Lake and 600'± Easterly of woods trail

8' steel sign post S 70 W 5.0'  
8' steel sign post N 70 E 5.0'

Monument Stamped  
S25  
S36 WP  
1989  
RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 311944

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
David S. Landecker

Date 5-1-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:40 A.M. on the 9 day of May A.D., 1989

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 311944

Statement of Evidence:

Witness Point West of the North Quarter Corner  
Section 36, Township 141 North, Range 28 West,  
Cass County, Minnesota

V-23 141-28  
Bk.7 Pg.40

1874 P. H. Conger, U.S. Deputy Surveyor, originally established the North Quarter corner position while subdividing Township 141 North, Range 28 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch Cedar South 85 degrees West a distance of 5 links; and a 9 inch Fir North 45 degrees East a distance of 7 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original corner. North Quarter Corner of Section 36 falls in Gijik Lake, as determined by single proportion between the Northeast and Northwest corners of said Section 36. Because this position was unsettable and determined lost, it was decided that a Witness Point will be set on the North line of Section 36 west of the Quarter Corner monumenting the corner position and section line.

1989 on February 24 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet as a witness point 934.37 feet Westerly of the lost Quarter corner position. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate.