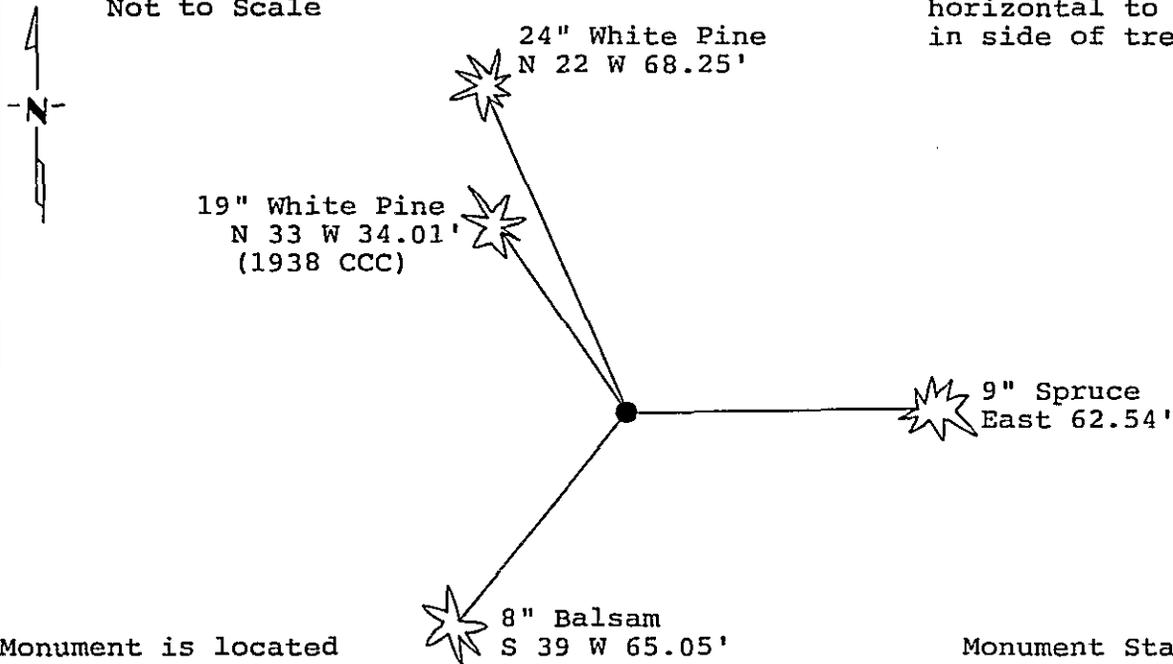


CERTIFICATE OF LOCATION OF GOVERNMENT CORNEREast Quarter _____ Corner of Section 35, Township 141 N, Range 28 W, 5th P.M.STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 46° 59' 07.010"Longitude: 94° 10' 51.762" On 11/1/88 found a 1" iron pipe and 1938 CCC bearing tree.
DATE left monument as found, lowered monument, removed monument (explain) On 3/10/89 placed a 2" by 48" iron pipe with brass cap and plastic
DATE
base with magnet.Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to ScaleAll distances are
horizontal to nail
in side of tree.Monument is located
100'± Northeasterly
of trail.

8' steel sign post South 4.0'

All trees are painted with red enamel and
marked with a 54-3 (bearing tree) tag.Monument Stamped
T 141 N R 28 WS35-S36
1989
RLS 17008

Statement of evidence relative to this corner location is on back of page.

311946I hereby certify that this survey, plan or
report was prepared by me or under my
direct supervision and that I am a duly
Registered Land Surveyor under the laws
of the State of Minnesota.David S. Landecker
David S. LandeckerDate 5-1-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of CassI hereby certify that this document was filed in
the Co. Recorders office at 9:50 A .M. on the
9 day of May A.D., 1989County Recorder Cherline KaylerBy ms, DeputyDOCUMENT NO. 311946

Statement of Evidence:

East Quarter Corner Section 35, Township 141
North, Range 28 West, Cass County, Minnesota

X-21 141-28
Bk.7 Pg.41

1874 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 28 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Fir South 40 degrees East a distance of 10 links; and an 8 inch Cedar North 32 degrees West a distance of 53 links.

1917 County Surveyor's Record Book B pages 593 show survey by James H. Flynn. He found a stub of original bearing tree; New ties a 13 inch Tamarack North 35 degrees 30 minutes East a distance of 37.6 feet; and a 9 inch Cedar North 31 degrees 15 minutes West a distance of 34.7 feet.

1938 Civilian Conservation Corps found post in good condition 48 inches above ground, marked a 7 inch White Pine North 14 degrees 40 minutes West a distance of 50 and 1/2 links.

1980 Walt Curo, Registered Land Surveyor Number 11395, found the 1938 CCC witness tie with location poster. He then reestablished this corner position from their perpetuation of the original corner as noted from previous surveys.

1986 U.S. Forest Service crews set an aerial target over this corner for the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 1 inch iron pipe set by Walt Curo, Registered Land Surveyor Number 11395, from the 19 inch White Pine with Forest Service Location Poster North 33 degrees West a distance of 34.0 feet, established as a witness by the CCC in 1938. No other evidence of 1874, 1917 or 1938 surveys.

1989 on March 10 a Landecker-Stevenson & Associates crew removed the 1 inch iron pipe and set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet in its place as a perpetuation of this corner position. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.