

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard

South Quarter \_\_\_\_\_ Corner of Section 36, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 46° 58' 45.313"  
Longitude: 94° 17' 31.001"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 2/24/89 placed a 3/4" by 5' aluminum rod with point, 3'  
DATE stabilizer and stamped aluminum cap.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale


All distances are horizontal to nail in side of tree.



9" Burr Oak  
N 10 W 116.05

20" Norway Pine  
N 10 E 148.56'

24" Norway Pine  
N 23 W 113.90

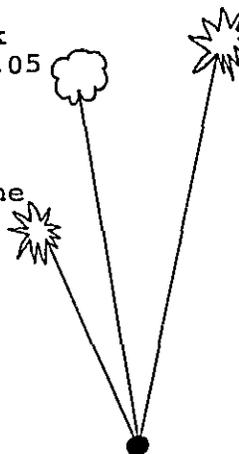

Monument is located in swamp  
800'± Easterly of County  
Road Number 5.  
(2) 8' steel sign posts  
Northerly 2.1'

Monument Stamped  
R29W  
SC  
1/4 S 36 T141N  
1989 T140N  
RLS 17008

All trees are painted with  
red enamel and marked with  
a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 311954

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
David S. Landecker

Date 5-1-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 9 day of May A.D., 19 89

County Recorder Clairine Kayler

By ms, Deputy

DOCUMENT NO. 311954

Statement of Evidence:

Standard South Quarter Corner Section 36,  
Township 141 North, Range 29 West, Cass County,  
Minnesota

Z-23 141-29  
Bk.6 Pg.42

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 18 inch Yellow Pine North 55 degrees West a distance of 115 links; and a 22 inch White Pine North 23 degrees East a distance of 233 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: several Pine stumps, but none fit or have blazes or scribing. No evidence of the original post or accessories.

1989 on February 24 and March 17 a Landecker-Stevenson & Associates crew set a 3/4 inch by 5 foot aluminum rod with 3 foot stabilizer, point and aluminum cap at the lost, single proportion position set on the arc between the computed position for the Southwest corner of Section 36 and the Southeast corner of Section 36, both in said township. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate.