

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 20 Meander Corner of Sections 28/33 Township 141 N, Range 29 W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 36.896"
 Longitude: 94° 21' 26.533"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/30/89 placed a 2 inch by 48 inch iron pipe with brass cap
DATE and plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

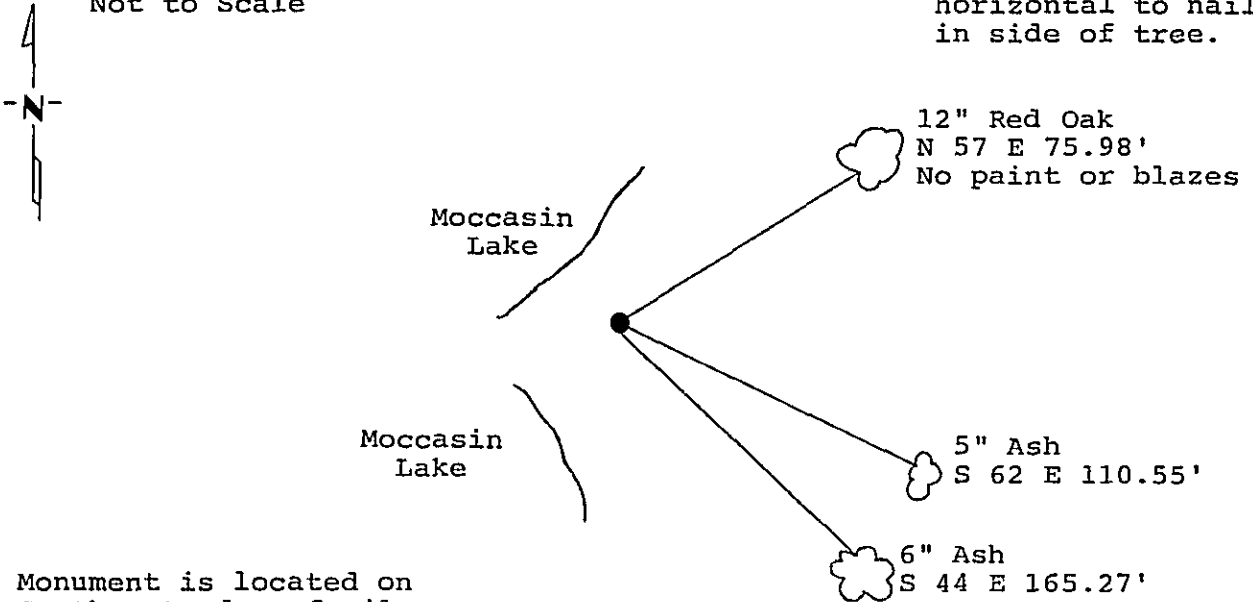

Monument is located on Southwest edge of pile of debris near East end of point.

8' Steel sign post East 4.0'

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Monument Stamped
 T 141 N R 29 W
 MC $\begin{matrix} S 28 \\ S 33 \end{matrix}$
 1989
 RLS 17008

Statement of evidence relative to this corner location is on back of page.

312152

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 5-12-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:02 P.M. on the 15 day of May A.D., 1989

County Recorder Claudine Kaye

By m), Deputy

DOCUMENT NO. 312152

Statement of Evidence:

Meander Corner Number 20, Sections 28 and 33,
Township 141 North, Range 29 West, Cass County,
Minnesota

V11-12 141-29
Bk.4 Pg.47

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 14 inch White Pine North 89 degrees East a distance of 77 links; and an 8 inch White Pine South 64 degrees East a distance of 90 links.

In the late 1970's Walt Curo, Registered Land Surveyor Number 11395, while surveying the south line of Government Lot 9, also being the south line of Section 28, set a 1 and 1/2 inch iron pipe near the east shore of Moccasin Lake not intending to be the true meander corner. This position was established by utilizing the point of land in this area on the easterly shore of Moccasin Lake as indicated on the original survey plat and notes. His iron was then set on a line being the extension of a line drawn easterly from the Southeast corner of Section 28 through the point of land on Moccasin Lake. This pipe then being on a line between the accepted southwest corner of Section 28 and a pipe he had established for the southeast corner of Section 28. (See corner report for southeast corner Section 28).

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 July 7 a Landecker-Stevenson & Associates, Inc. crew searched for this meander corner position at a computed position on line between the accepted southeast corner of Section 28 and the Landecker-Stevenson position of the southwest corner of Section 28 being as established by the 1918 General Land Office resurvey. This position fell in the lake. A search was then made in a position that fit the physical location as layed-out from the original meander notes approximately North 35 degrees East a distance of 60 feet from the target location. No original evidence of the corner or its accessories were found. Curo's pipe is South 63 degrees East a distance of 77.58 feet from the target.

1988 October 20 a Landecker-Stevenson & Associates, Inc. crew located the easterly shore of Moccasin Lake, north and south of the target for comparison and examination of this corner location in relation to that as originally measured and as noted in the meander notes of 1873.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner Number 20, Sections 28 and 33,
Township 141 North, Range 29 West, Cass County,
Minnesota

V11-12 141-29
Bk.4 Pg.47

1989 January 14 and 17, David Landecker, Licensed Land Surveyor Number 17008, and Landecker-Stevenson crews review the meander line and corner location on site after evaluating previously collected data. The crew located improvements near the south line of Section 28.

This surveyor, has therefor, established the corner at the obliterated position using the physical location of the lake shore as it is witnessed and fits with the meanders as noted in the records of the original 1873 survey. This relationship being similar to the other meander corners at intersecting section lines on Moccasin Lake. This position is also in a location as utilized by Walt Curo previously. This corner position, when connected with the southeast corner of Section 28 determined by Landecker-Stevenson & Associates, Inc., also runs in a direction in harmony to that as measured along the Easterly segments of section lines for the tier of sections directly North of Section 28. That being Section 16 and Section 9, these lines being retraceable to the original 1873 survey. The comparison of those lines then indicate a similar pattern exists as established by the original surveyor.

1989 on March 30 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.