

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 33, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 14.382"  
 Longitude: 94° 20' 48.940"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 4/5/89 placed a 2 inch by 48 inch iron pipe with brass cap  
DATE and plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

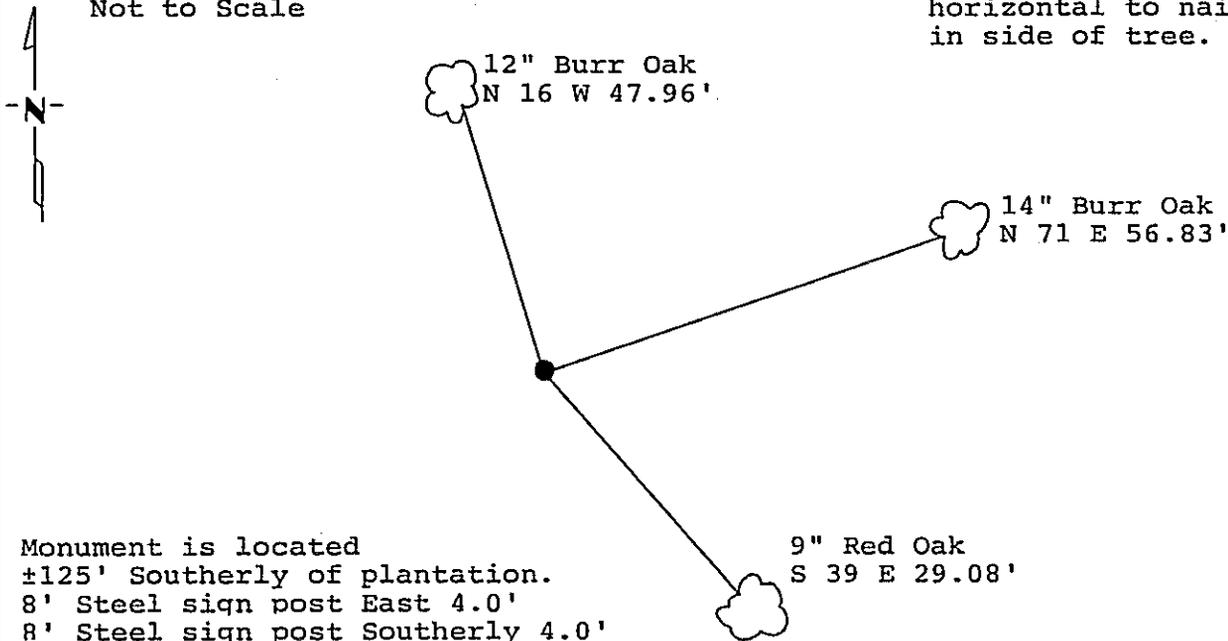

Monument is located  
 ±125' Southerly of plantation.  
 8' Steel sign post East 4.0'  
 8' Steel sign post Southerly 4.0'

9" Red Oak  
 S 39 E 29.08'

Monument Stamped  
 T 141 N R 29 W  
 S33+S34  
 1989  
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

312156

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 5-12-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:06 P. M. on the 15 day of May A.D., 1989

County Recorder Claudine Kayla  
 By Ms, Deputy

DOCUMENT NO. 312156

Statement of Evidence:

East Quarter Corner Section 33, Township 141  
North, Range 29 West, Cass County, Minnesota

X-13 141-29  
Bk.6 Pg.19

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch White Oak South 82 degrees East a distance of 26 links; and a 6 inch Burr Oak South 20 degrees West a distance of 29 links.

1986 U.S. Forest Service records show the following: technician Ekstrom searched for corner, but found no evidence.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: position falls on Hardwood Ridge 230 feet, more or less, southerly of trail; no evidence of 1873 post or Oak bearing trees. Corner determined lost.

1989 on April 5 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet. This corner was established at the lost, single proportion position between the monumented Northeast corner and computed Southeast corner of said Section 33. New bearing trees were marked as shown and steel sign posts are in place as noted on front of this certificate.