

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to

Number 1 Meander Corner of Section 34, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 58' 46.371"
 Longitude: 94° 20' 32.996"



On 11/8/88 found a 1 and 1/2 inch iron pipe.
DATE

left monument as found, lowered monument, removed monument (explain)

On 4/6/89 placed a 3/4 inch by 2 foot aluminum rod with stamped
aluminum cap inside found 1 and 1/2 inch iron pipe.
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

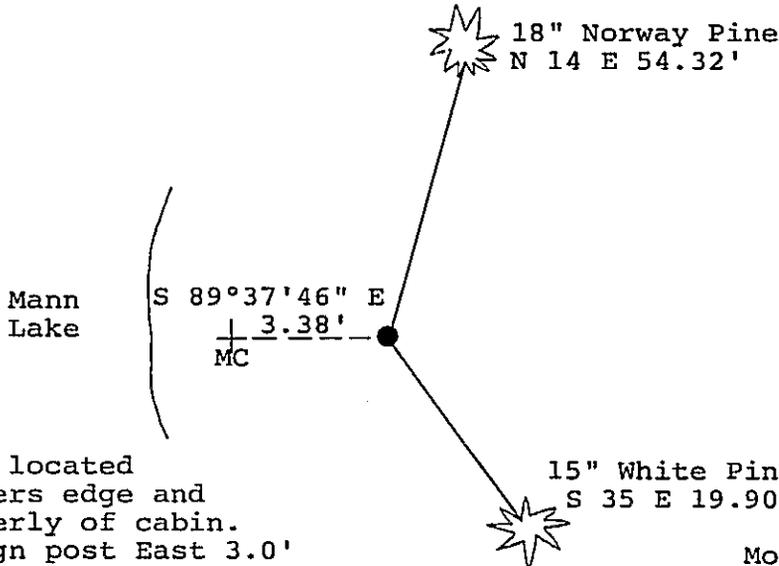

Monument is located
 5' from waters edge and
 ±125' Southerly of cabin.
 8' steel sign post East 3.0'

15" White Pine
 S 35 E 19.90'

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Monument Stamped
 R 29 W
 WC \ S 34 T141N
 MC \ S 4 T140N
 1989
 RLS 17008

Statement of evidence relative to this corner location is on back of page. 312161

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 5-12-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:15 P. .M. on the 15 day of May A.D., 1989

County Recorder Claudia Kayler
 By ms, Deputy

DOCUMENT NO. 312161

Statement of Evidence:

Witness Corner to Meander Corner Number 1 Section
34, Township 141 North, Range 29 West, Cass
County, Minnesota

Z13-14 141-29
Bk.6 Pg.36

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch White Birch North 41 degrees East a distance of 44 links; and a 7 inch White Birch South 11 degrees East a distance of 27 links.

1966 R.F. Schneider, Registered Land Surveyor Number 5740, found evidence of meander corner and established a 2 inch pinched top iron pipe at a position 3.38 feet easterly of the true meander corner and called it a witness corner to the meander corner.

1973 and 1974 Myron Landecker, Registered Land Surveyor Number 7452, used the corner as perpetuated by Schneider in numerous surveys along the 10th Standard Parallel.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 1 and 1/2 inch iron pipe, established by Schneider as Witness corner; no evidence of original bearing trees.

1989 on April 6 a Landecker-Stevenson & Associates crew set a 3/4 inch by 2 foot aluminum rod with stamped aluminum cap inside found 1 and 1/2 inch iron pipe. This corner was determined to be in a position witnessing the true Meander corner as perpetuated by Schneider in 1966. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.