

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard

South Quarter Corner of Section 35, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 46° 58' 45.828"
 Longitude: 94° 18' 46.700"



On 11/9/88 found a 1 and 1/2 inch iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 4/21/89 placed a 2 inch by 48 inch iron pipe with brass cap
DATE
 and plastic base with magnet. Replace found 1 1/2" iron pipe alongside E.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

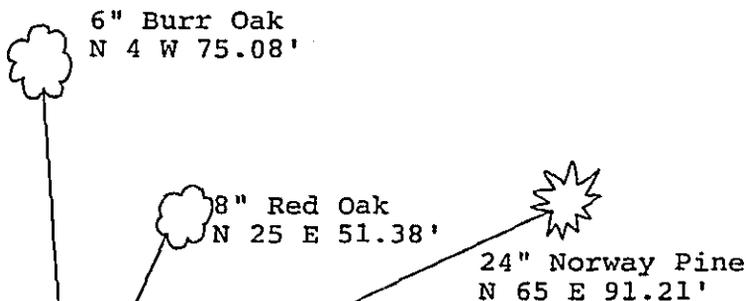

Monument is located 200'± North of North end of small lake.
 8' steel sign post East 4.0'
 8' steel sign post North 4.0'

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Monument Stamped
 R29W
 SC

S 1/4	S35	T141N
S2		T140N

 1989
 RLS 17008

Statement of evidence relative to this corner location is on back of page. 312366

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 5-24-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A. M. on the 25 day of May A.D., 1989
 County Recorder Claudine Kayler
 By MS, Deputy
 DOCUMENT NO. 312366

Statement of Evidence:

Standard South Quarter Corner Section 35,
Township 141 North, Range 29 West, Cass County,
Minnesota

Z-19 141-29
Bk.6 Pg.40

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Aspen North 70 degrees West a distance of 22 links; and a 7 inch Maple North 86 and 1/2 degrees East a distance of 53 links.

1964 U.S. Forest Service records show the following: technician Ekstrom searched for corner, but found no evidence.

1977 Bruce R. Buxton, Registered Land Surveyor Number 11309, surveys the plat of NORDHEIM. Plat shows iron pipe set. Monument set proportionally on line between Southeast section corner and existing East Meander corner on Barnum Lake.

1983 Gary Stevenson, Registered Land Surveyor Number 12684, finds monument as used by Buxton and verifies its location. Mr. Stevenson runs North-South quarter line from existing monument.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of 1863 bearing trees; the 1 and 1/2 inch iron pipe set by Buxton in plat of NORDHEIM.

1989 on April 21 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet in place of existing monument. This position was accepted as a perpetuation of the original corner. New bearing trees were marked as shown and steel sign posts are in place as noted on front of this certificate.