

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 15, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 5/14/86 found a 8" square stone down 0.6'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/6/87 ~~drilled~~ drilled a hole in stone and set in
DATE two $1\frac{1}{2}$ " irons, one $7\frac{1}{2}$ " and one $4\frac{1}{2}$ "

SKETCH OF REFERENCE TIES

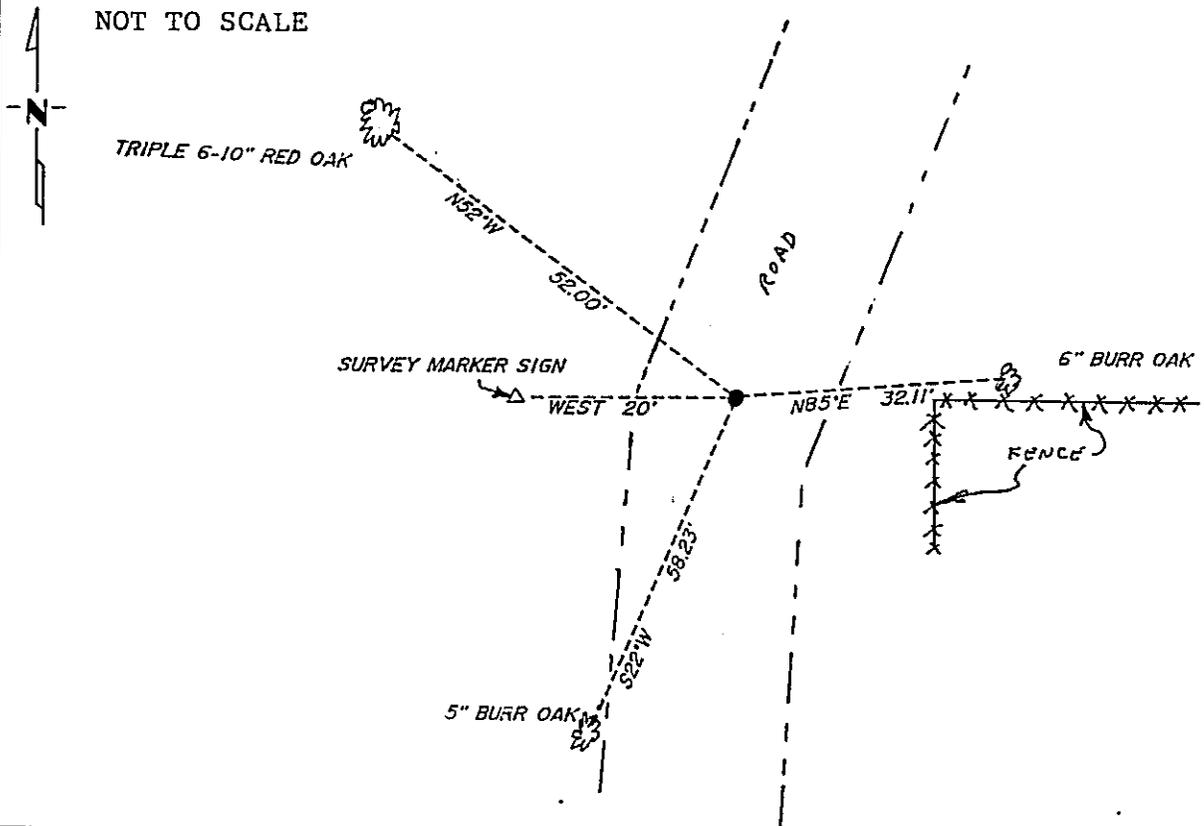

Statement of evidence relative to this corner location is on back of page. 317848

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Ross 1-12-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:30 P. .M. on the 12 day of January A.D., 19 90

County Recorder Claudine Kayler
 By MS, Deputy

DOCUMENT NO. 317848

Statement of Evidence:

East Quarter Corner, Section 15, T.134N.,
R.31W., 5th P.M.

L-17

- 1869 U.S. General Land Office survey set a wood post and marked the following bearing trees: a 6" Oak S48E 38 links, and a 6" Spruce S33W 25 links.
- 1908 County Survey Record Book "A", pages 70-71, show a survey by John Curo. He found the Oak bearing tree and the stump of the Spruce bearing tree. He set an 8"x 8"x 36" stone.
- 1985 On November 1, Cass County Survey Technician Terry Freeman talked with Paul Crocker, landowner on section 15. He said that the top of the stone was broken off years ago and maybe the base was still in place.
- 1986 On May 14, Terry Freeman and backhoe operator Glenn Williams found an 8" stone down 0.4'. The following bearings were marked: a 6" White Oak N85E 32.10', a 6-10" Triple White Oak N53W 52.0' and a survey marker sign west 20'.