

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 15, Township 134N., Range 31 W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/23/86 placed a 2"x18" telespar with aluminum cap down 1'
DATE in centerline east-west road in line with fence south.

SKETCH OF REFERENCE TIES

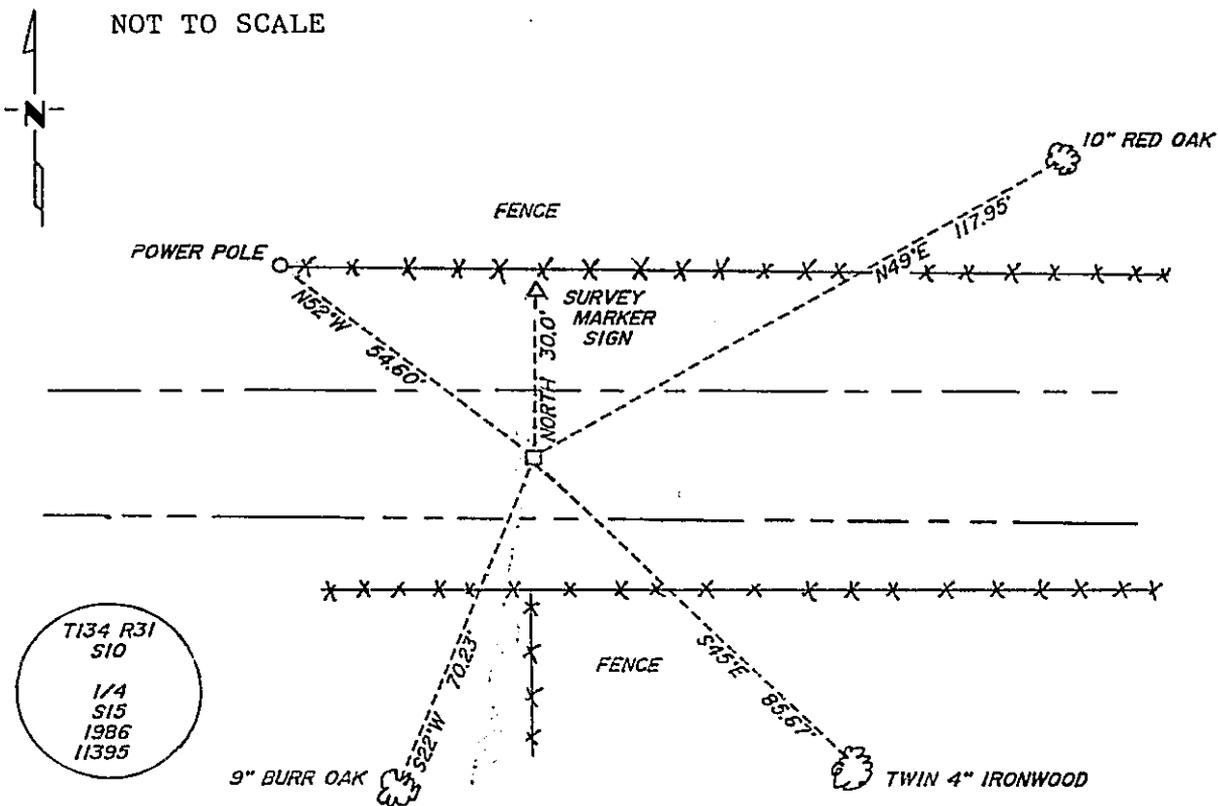

Statement of evidence relative to this corner location is on back of page. 318240

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt C. Olson 1-29-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:12 P. .M. on the 31 day of January A.D., 19 90
County Recorder Cherise Kaye
By ms, Deputy
DOCUMENT NO. 318240

Statement of Evidence:

J-15

North Quarter Corner, Section 15, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 4" Oak N12E 14 links, and an 8" Aspen S45E 10 links.
- 1986 On May 14, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in area of fence south. They dug 10' east to west by 9' north to south by 4½' deep. The top 2½' was gravel and rocks and then they dug 2' into natural sandy rocky clay. They found numerous load stones and rock.
- 1986 On October 23, Terry Freeman placed a 2"x 18" telespar with an aluminum cap down 1' in the centerline of the east to west road in line with the fence to the south.