

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 24, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/6/86 placed a 2x18" telespar with a stamped aluminum
DATE
cap down 8" in the centerline, north to south rd. in line with fence west

SKETCH OF REFERENCE TIES

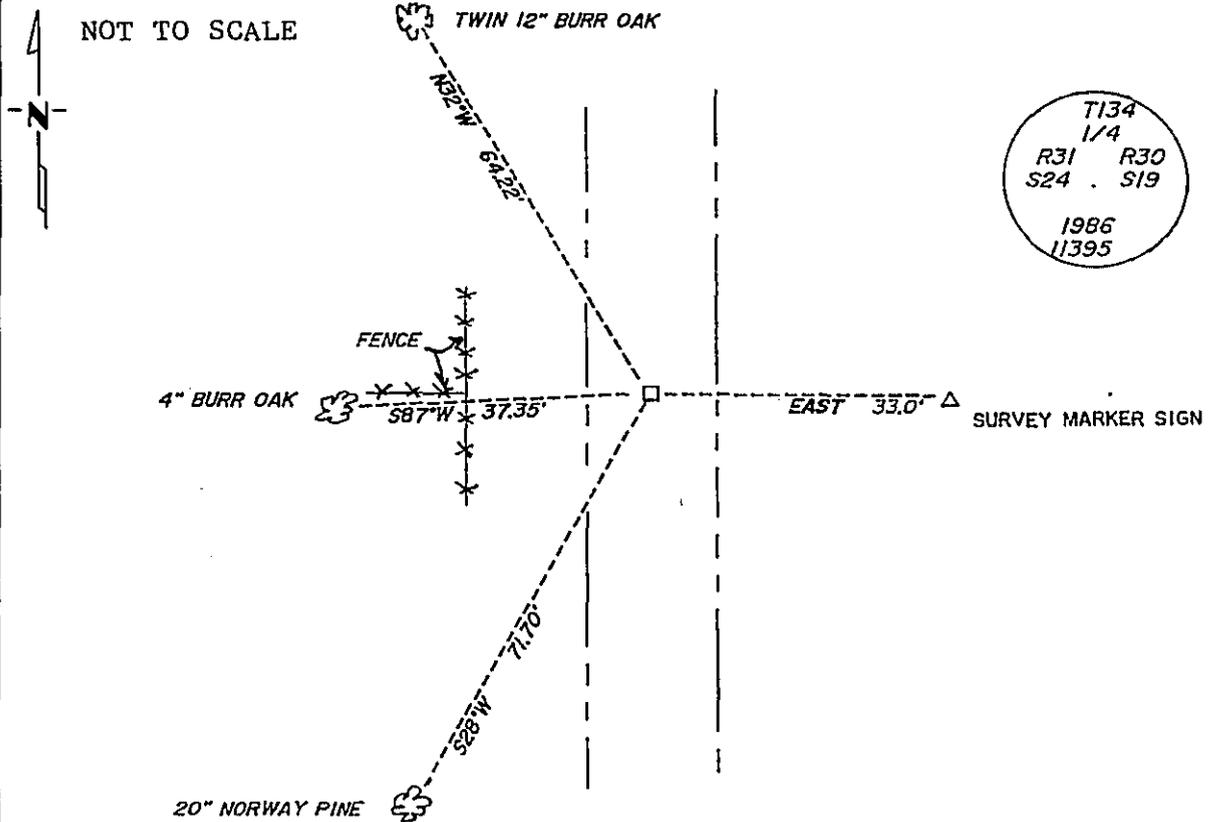

Statement of evidence relative to this corner location is on back of page. 318245

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Green 1-27-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:17 P.M. on the 31 day of January A.D., 1990

County Recorder Cloude Kayler
By MS, Deputy

DOCUMENT NO. 318245

Statement of Evidence:

P-25

East Quarter Corner, Section 24, T.134N., R.31W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 6" Aspen N45W 12 links and a 6" Aspen S65E 41 links.
- 1986 On May 16, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in area of north to south road at the old fence to the west. They dug 12' north to south by 8' east to west by 3.25' deep. The top 0.25' was topsoil then followed by 2' of fill. They then dug 1' into natural gravel.
- 1986 On October 6, Terry Freeman and Norman Morris set a 2"x 18" telespar monument with an aluminum cap down 8" in the centerline of the north to south road in line with an old fence to the west.