

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 6, Township 133N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 10/8/86 placed a cast iron monument down 10".

SKETCH OF REFERENCE TIES

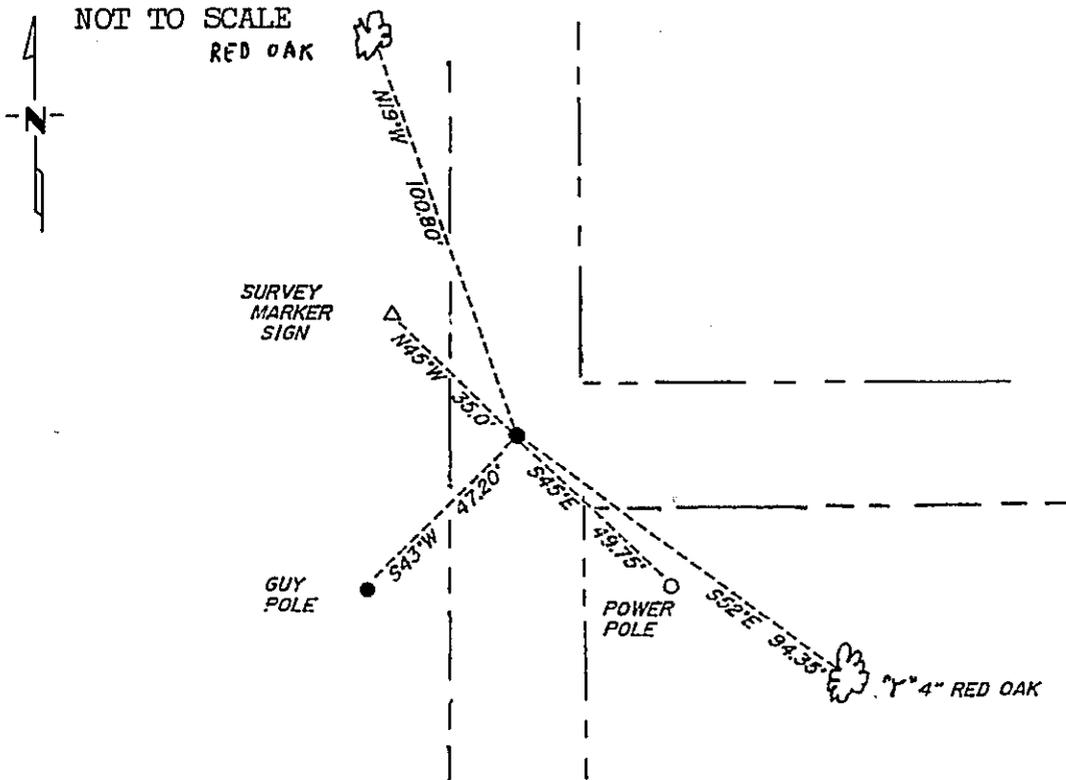

Statement of evidence relative to this corner location is on back of page. 318246

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter P. Cass 1-29-90
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:18 P. M. on the 31 day of January A.D., 19 90

County Recorder Christine Koyh
 By MS, Deputy
 DOCUMENT NO. 318246

Statement of Evidence:

A-5

Northeast Corner, Section 6, T.133N., R31W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 6" Black Oak N25E 20 links, an 8" Black Oak S40E 36 links, an 8" Black Oak S85W 25 links, and an 8" Aspen N25W 33 links.
- 1907 County Survey Record Book "A", pages 10-11, show a survey survey by John Curo. He set an 8"x 8"x 36" stone and marked the following bearing trees: a Tamarack in the culvert N67-50E 35.24', a 2" Burr Oak S79-45E 34', a 2" Burr Oak S8-25W 12.10', and a 2" Burr Oak stump N38-20W 11.60'.
- 1985 On November 7, Terry Freeman of the Cass County Surveyors Office and backhoe operator Glen Williams, dug in the intersection of roads going north to south and going east. They dug 16' north to south by 13' east to west by 3' deep. They found 6" of sandy gravel top, 1' of fill and then 1½' natural sandy gravel.
- 1986 On October 8, Terry Freeman placed a cast iron monument down 10".