

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 4, Township 133N., Range 31W., 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/15/86 placed a 2" x 18" telespar with an aluminum cap in
DATE
centerline east to west road in line with fence north.

NOT TO SCALE

SKETCH OF REFERENCE TIES

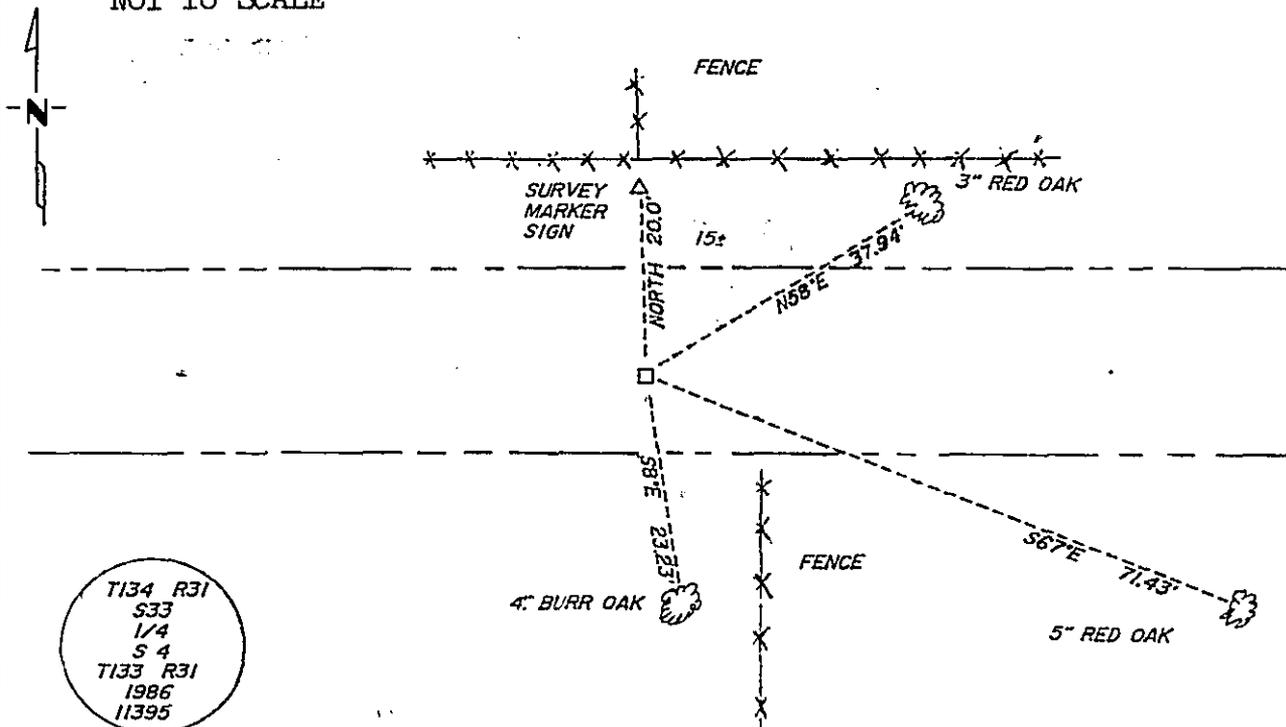

Statement of evidence relative to this corner location is on back of page. 318313

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Allen 2-5-90
SIGNATURE DATE

Registration No. 11395

Land Surveyor

County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:35 P. on the 5 day of February A.D., 1990

County Recorder Clairaine Keyler

By me, Deputy

DOCUMENT NO. 318313

Statement of Evidence:

A-11

North Quarter Corner, Section 4, T133N., R.31W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: an 8" Pine S52W 25 links and an 8" Tamarack N35E 25 links.
- 1986 On May 19, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in east to west road and in area of north to south fences that are 15' apart. They dug 9' north to south by 27' east to west by 2-3' deep. At the east end of the digging they dug down 2'. They dug into 1' of fill and dug into 1' of clay-gravel natural ground. The west end of the digging was 3' deep. They found 1.5' of top and fill and dug 1.5' into clay-gravel natural ground and found nothing.
- 1986 On October 15, Terry Freeman placed a 2"x18" telespar with an aluminum cap in the centerline east to west road in line with fence north.