

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 10, Township 133N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 5/19 found a 1.5' square piece of concrete (base of stone or iron) down ^{DATE} 2', 1' north of E-W centerline, in line with centerline N.
 - left monument as found, lowered monument, removed monument (explain)
- On 10/28/86 placed a 2"x18" telespar with aluminum cap driven into center ^{DATE} of found concrete down 1 1/2'.

SKETCH OF REFERENCE TIES

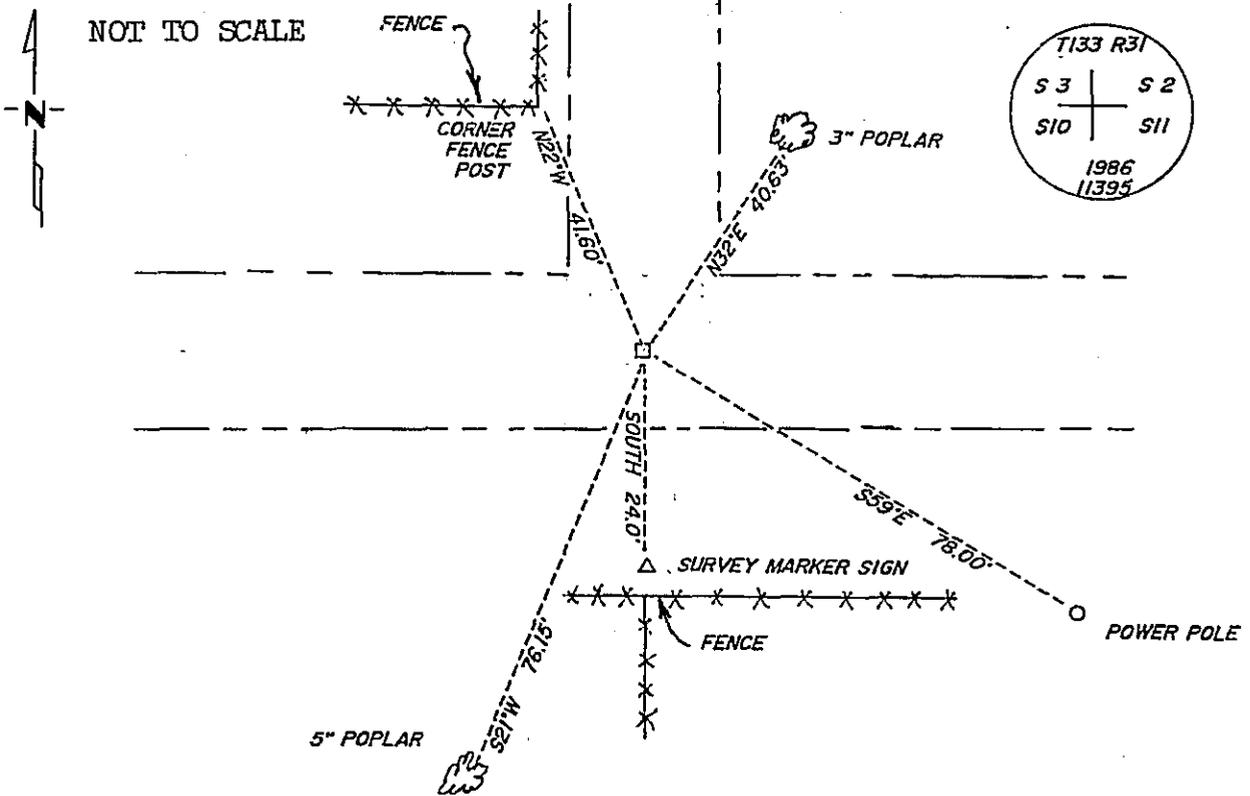

Statement of evidence relative to this corner location is on back of page. 318315

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter P. Ross 2-5-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:45 P.M. on the 5 day of February A.D., 1990

County Recorder Claudia Kuyler

By ms, Deputy

DOCUMENT NO. 318315

Statement of Evidence:

E-17

Northeast Corner, Section 10, T.133N., R.31W., 5th P.M.

- 1863 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 5" Pine N43W 17 links, a 15" Spruce S71E 10 links, and a 5" Spruce N68Eb 20 links.
- 1986 On May 19, Terry Freeman of the Cass County Surveyors Office and backhoe operator found a 1.5' square piece of concrete down 2'. It was the base of a stone or pipe and it was in line with centerline road north and it was 1' north of east to west centerline, Bearings made: a 4" Poplar N37E 25.65' and a corner fence post N20W 41.60'.
- 1986 On October 28, Terry Freeman placed a 2" by 18" telespar monument down 1.25' by driving it into the center of the found piece of concrete.