

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 22, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9/19/86 placed a cast iron monument down 8" in  
DATE intersection of roads.

### SKETCH OF REFERENCE TIES

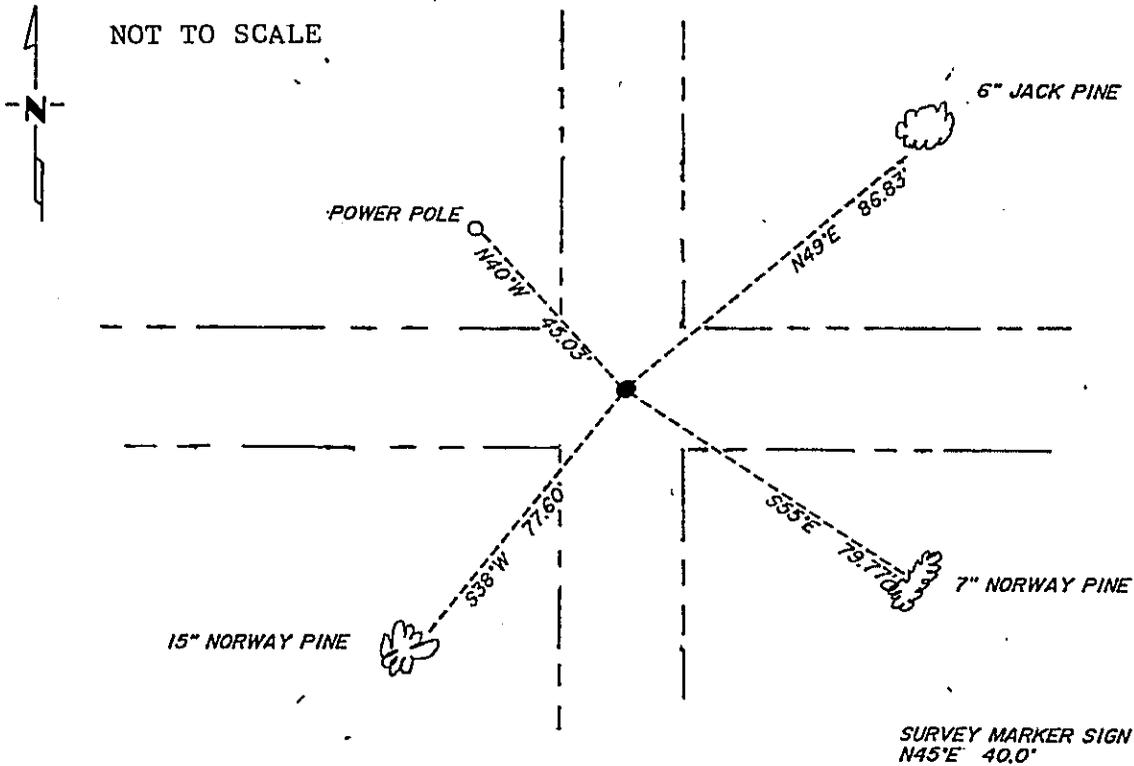

Statement of evidence relative to this corner location is on back of page. 318318

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Claus 2-5-90  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P. M. on the 5 day of February A.D., 19 90

County Recorder Claudine Kayla

By MS, Deputy

DOCUMENT NO. 318318

Statement of Evidence:

N-17

Northeast Corner, Section 22, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 7" Black Pine S29E 30 links, an 8" Black Pine S84W 33 links, a 10" Black Pine S86E 18 links, and a 10" Black Pine N25 20 links.
- 1908 County Survey Record Book "A", pages 54-55, show a survey by John Curo. He set an 8"x 8"x 36" stone and marked the following bearings: a 6" Jack Pine N36-08E 35', a 4" Jack Pine S61-14W 6.15', and an 8" Norway Pine S38-17E 7.80'.
- 1985 On November 1, Cass County Survey Technician Terry Freeman talked to Paul Crocker a resident in section 15. He said the stone was bladed out years ago. He searched the area southwest of the corner and found an 8"x 8"x 36" stone in concrete bladed out lying in woods.
- 1986 On September 19, Terry Freeman and Norman Morris set a cast iron monument down 8" in the intersection of north to south and east to west roads.