

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 19, Township 134N., Range 31W., _____ P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/8/86 placed a 2x18" telespar with an aluminum cap down
DATE
8" in centerline of the north to south rd. in line with old fence east.

SKETCH OF REFERENCE TIES

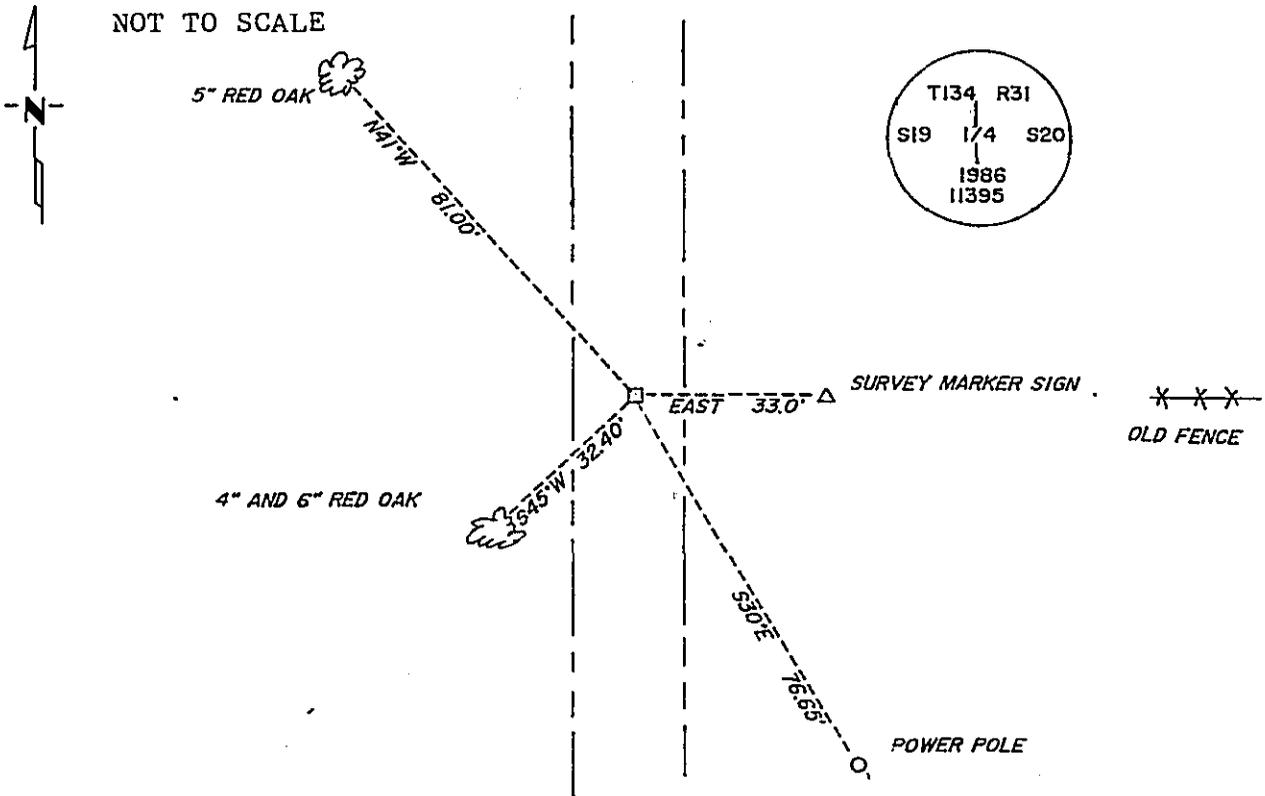

Statement of evidence relative to this corner location is on back of page. 318319

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter P. Allen 2-5-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:05 P. on the 5 day of February A.D., 19 90

County Recorder Claudine Kayser

By MS, Deputy

DOCUMENT NO. 318319

Statement of Evidence:

P-5

East Quarter Corner, Section 19, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 10" dead Tamarack S67E 32 links and a 20" Pine N16W 43 links.
- 1985 On November 7, Terry Freeman of the Cass County Surveyors Office and backhoe operator Glen Williams dug in the area of the north to south road and the north to south position provided by the company of Comstock and Davis. They dug a hole 8'x 8'x 6' deep. The top 3' was fill with many rocks and the next 3' was sandy gravel.
- 1986 On October 8, Terry Freeman placed a 2"x18" telespar with an aluminum cap down 8" in the centerline of the north to south road in line with old fence to the east.