

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter \_\_\_\_\_ Corner of Section 19, Township 140N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11/2/87 found a 1" iron pipe down 0.25' in centerline of the  
DATE east to west road.
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

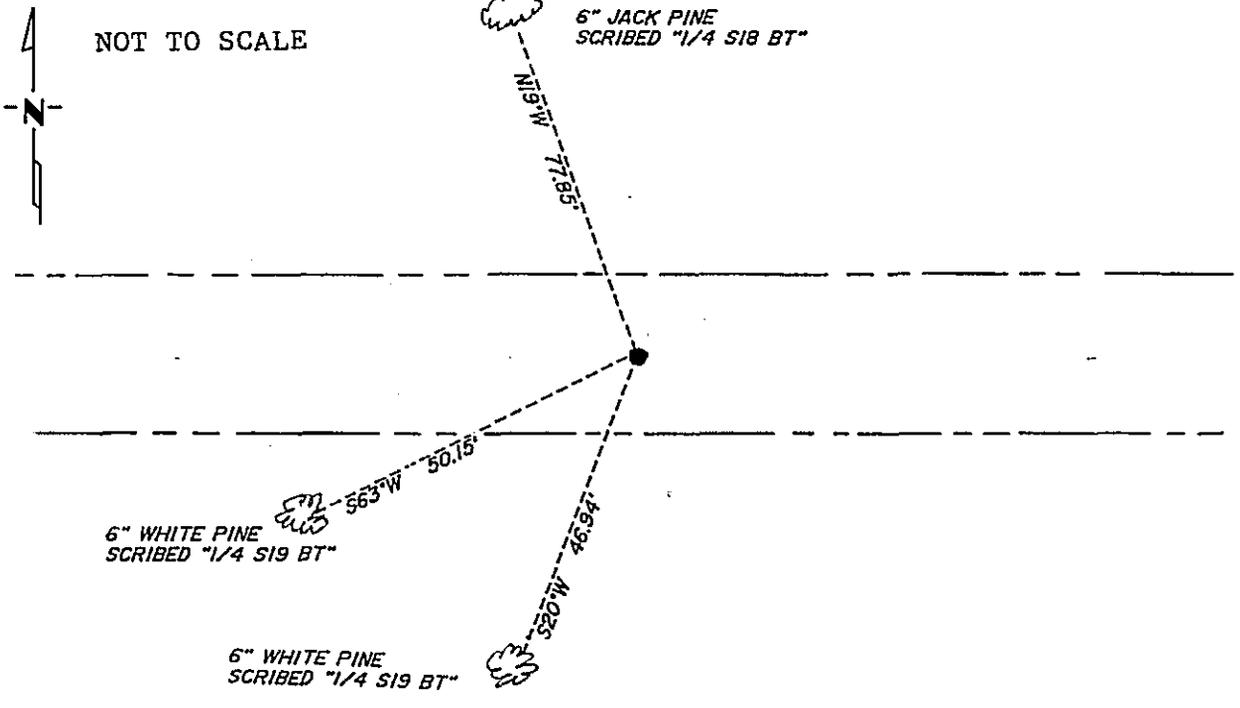

The measurement was taken to the nail in the side of tree. All the bearing trees were double blazed, scribed, painted blaze orange, and 54-3 Bearing Tree tag attached.

Statement of evidence relative to this corner location is on back of page. 318320

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 2-5-90  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:10 P. .M. on the 5 day of February A.D., 19 90

County Recorder Claudia Kayler

By ms, Deputy

DOCUMENT NO. 318320

Statement of Evidence:

N-3

North Quarter Corner, Section 19, T.140N., 31W., 5th P.M.

1870 U.S. General Land Office survey set a post for this corner and marked the following bearing trees: a 3" Pine S5E 34<sup>5</sup>links and 10" Dead Pine north 160 links.

Walt Curo (Registered Land Surveyor # 11395) while surveying in the area looked for the corner, but not finding any evidence, set a corner at proportional position. He set a 1" iron pipe.

1987 On November 2, Cass County Survey Technician Terry Freeman and Forester Larry Olson found a 1" iron pipe in the ground down 0.25' in the centerline east to west road and marked the bearing trees as shown on the front of this certificate.