

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 23, Township 133N., Range 31W., 5th P.M.  
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 10/24/85 found a 3/4" iron pipe with Registered Land Surveyor  
DATE  
cap # 9672.

left monument as found,  lowered monument,  removed monument (explain)

On 8/11/87 placed a 2" x 18" telespar monument with stamped  
DATE  
aluminum cap down 1', 18' east of centerline rd N, centerline E-W.

SKETCH OF REFERENCE LINES

NOT TO SCALE

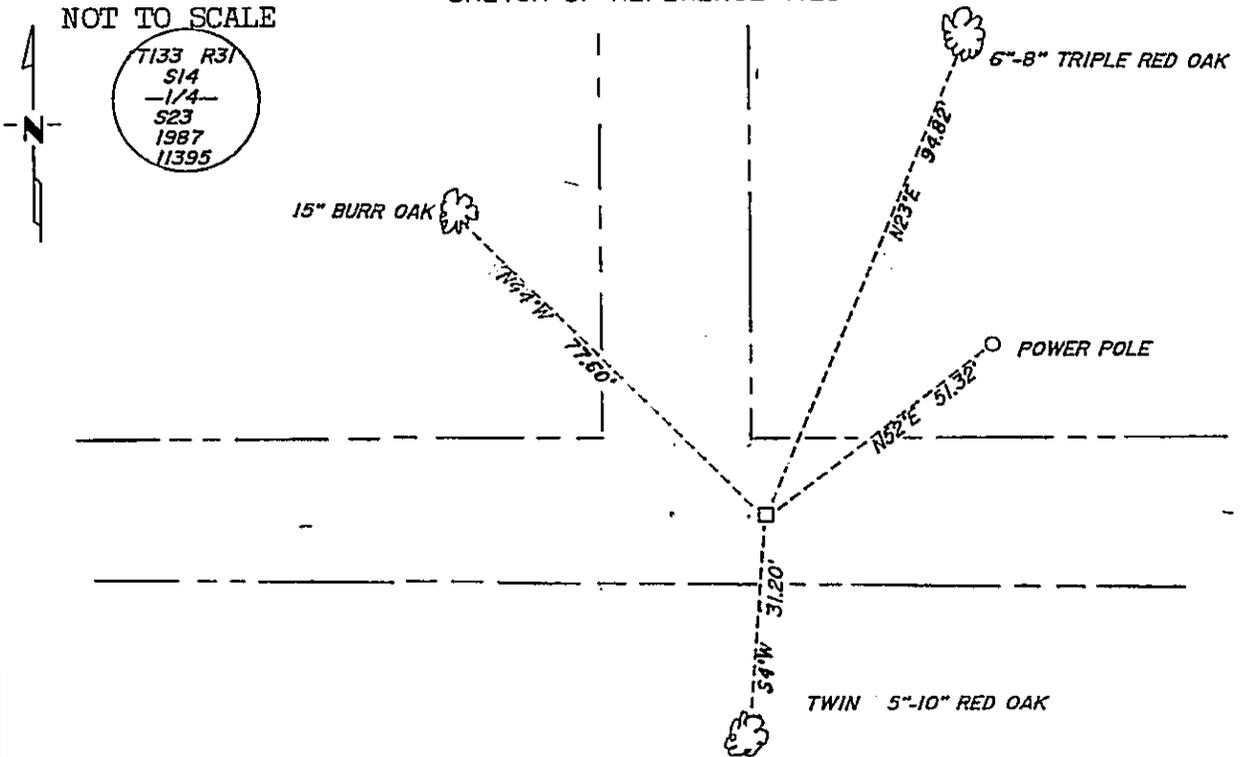

Statement of evidence relative to this corner location is on back of page. 319093

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

W. W. P. Law 3-15-90  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:20 P. M. on the 19 day of March A.D., 19 90

County Recorder Chadine Krogan

By ms, Deputy

DOCUMENT NO. 319093

Statement of Evidence:

N-19

North Quarter Corner, Section 23, T.133N., R.13W., 5th P.M.

- 1863 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 7" Aspen S36W 6 links and a 7" Aspen N3E 19 links.
- 1985 On October 24, Cass County Survey Technician Terry Freeman found a  $\frac{1}{2}$ " iron pipe with the Registered Land Surveyor number "9672" on it.
- 1987 On August 11, Terry Freeman removed the  $\frac{1}{2}$ " iron pipe . He replaced it with a 2"x 18" telespar monument with a stamped aluminum cap. The corner is in the east to west centerline road and 18' east of centerline road north in line with shelter belt south.