

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 14, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE _____
 left monument as found, lowered monument, removed monument (explain)
- On 1986 placed a 2" x 18" telespar monument with a stamped aluminum cap in centerline of east to west road down 8".
DATE _____

SKETCH OF REFERENCE TIES

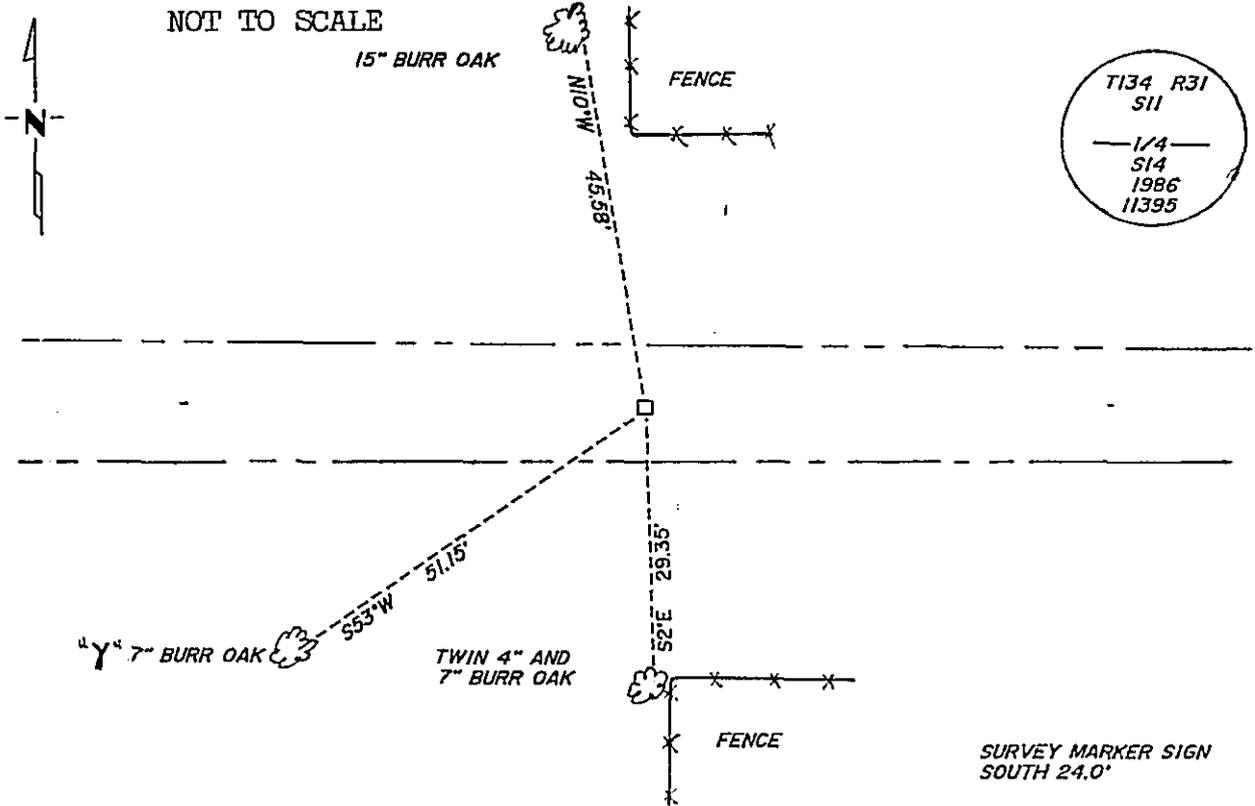

Statement of evidence relative to this corner location is on back of page.

319097

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Crow 3-2-90
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:40 P. M. on the 19 day of March, A.D., 19 90

County Recorder Clairine Kayler
By ms, Deputy

DOCUMENT NO. 319097

Statement of Evidence:

J-19

North Quarter Corner, Section 14, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 3" Aspen N3E 12 links and a 3" Aspen S28W 24 links.
- 1986 On May 14, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in area of fences north and south and of road east to west. They dug 9' north to south by 16' east to west by 4.5' deep and found the following: 1.5' of class five fill, 2' of fill, and 1' of clay-loam.
- 1986 Terry Freeman placed a 2"x 18" telespar monument with a stamped aluminum cap in the centerline of road going east to west down 8".