

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 2, Township 142N, Range 26W, 5th P.M.  
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1-17-1990 found a 2" X 60" bronze capped monument  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Monument Marked

SKETCH OF REFERENCE TIES  
not to scale

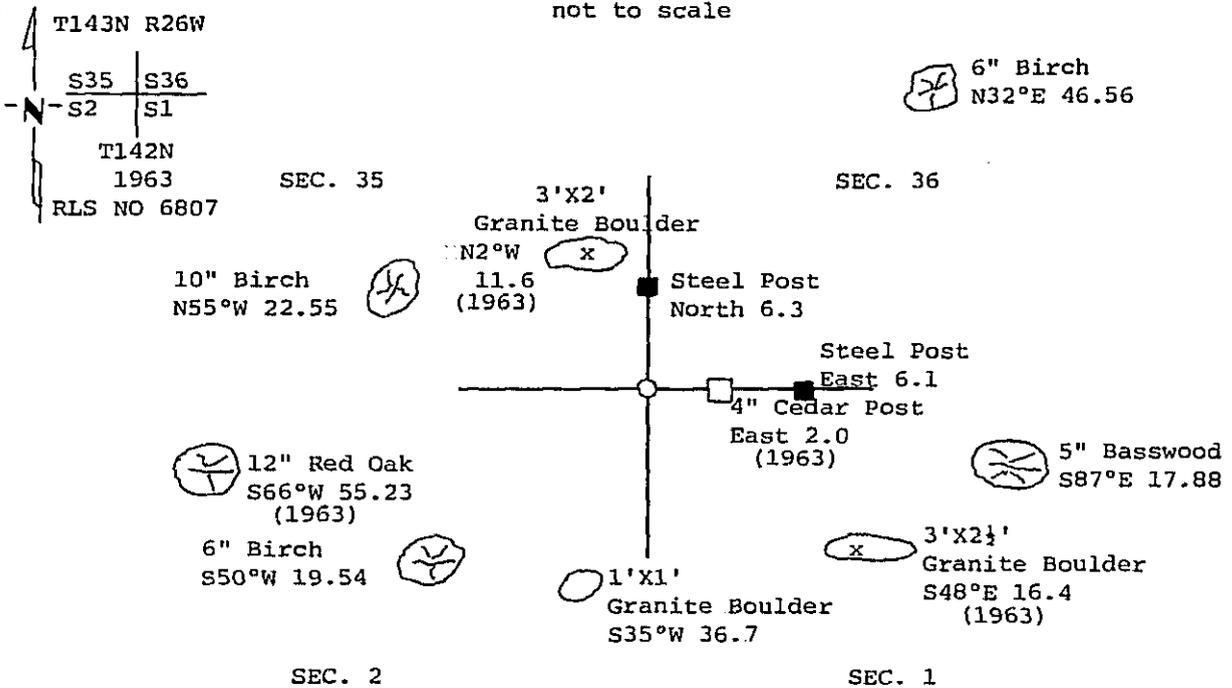

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

319604

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Orsinger

Date 3/20/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:10 A. A.M. on the 12 day of April A.D., 19 90  
 County Recorder Claudia Kayler  
 By ms, Deputy  
 DOCUMENT NO. 319604

Statement of Evidence:

Z21 Southeast corner section 35

Cor. 1,2,35 and 36, (SE Cor. Sec. 35)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
Spruce 6" S 72 degrees E, 13 Links (8.58 feet)  
Fir 12" N 33 degrees W, 21 Links (13.86 feet)  
Tamarack 10" S 25 degrees W, 7 Links (4.62 feet)  
Fir 9" N 30 degrees E, 17 Links (11.22 feet)
- 1937 J.A. Gjelhaug, USFS, set a 1.5" diameter iron pipe (notes are unclear as to method used to establish position) and the following reference:  
Balm of Gilead 8" N 2 degrees 30 minutes E, 68 Links (44.88 feet)
- 7-2-1940 R. Defant, CCC form 874-9 on file Cass Lake USFS, found Gjelhaug pipe and added the following reference:  
Aspen 8" N 31 degrees E, 81 Links (53.46 feet)
- 1963 W. Okerman found Gjelhaug pipe, replaced with a 2"X 60" brass capped pipe and added the following witnesses:  
Granite Boulder 1'x1'x1' S 35 degrees W, 36.7 feet  
Granite Boulder 3'x2.5'x1.5' S 48 degrees E, 16.4 feet  
Granite Boulder 3'x2'x1' N 02 degrees W, 11.6 feet  
Oak 8" S 66 degrees W, 55.2 feet  
Cedar Post 4"x4" East, 2.0 feet  
An affidavit as to location of Government corner was filed for record in the office of the Cass County Recorders Office from the above information by William H. Okerman, RLS, on October 20, 1964.
- 1-17-1990 Personnel from Kovanen & Osufsen Inc. found U.S.F.S. monument in good condition and U.S.F.S. witnesses add spike to Oak;  
Granite Boulder 1'x1'x1' S 35 degrees W, 36.7 feet  
Granite Boulder 3'x2.5'x1.5' S 48 degrees E, 16.4 feet  
Granite Boulder 3'x2'x1' N 02 degrees W, 11.6 feet  
Oak 8" S 66 degrees W, 55.23 feet  
Cedar Post 4"x4" East, 2.0 feet  
we add the following witnesses:  
Birch 10" N 55 degrees W, 22.55 feet  
Birch 6" N 32 degrees E, 46.56 feet  
Basswood 5" S 87 degrees E, 17.88 feet  
Set 8' long steel sign post with sign attached, North 6.3 feet  
Set 8' long steel sign post with sign attached, East 6.1 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.