

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 10, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 10-19-1989 found a 2" X 36" brass capped monument
DATE

left monument as found, lowered monument, removed monument (explain)

On placed a
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

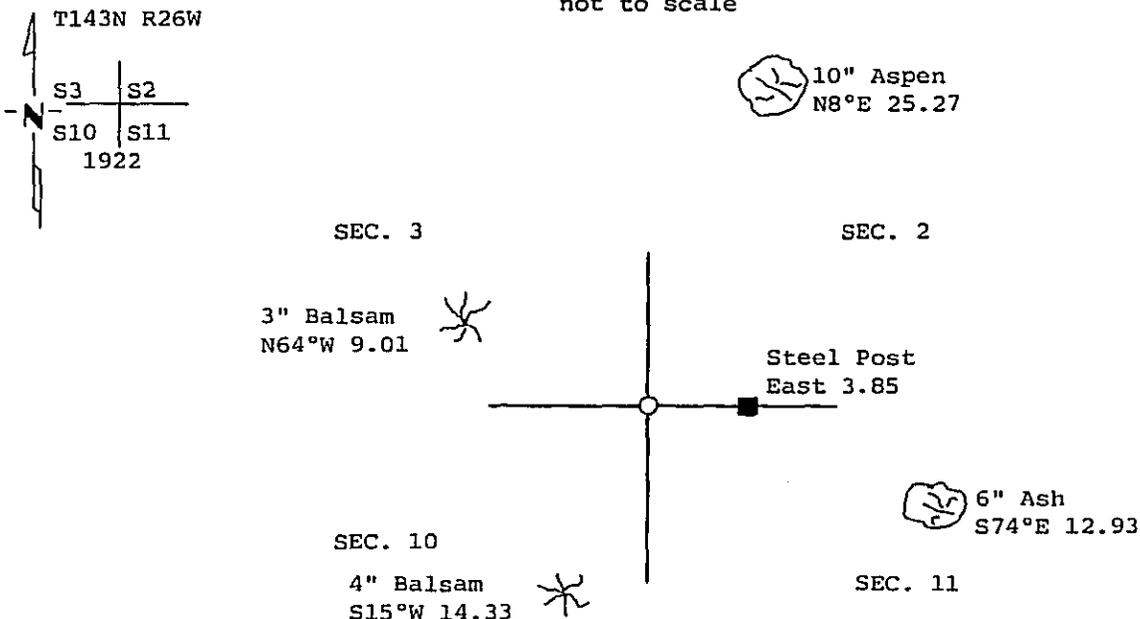

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

bearings are true

Statement of evidence relative to this corner location is on back of page. 319609

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osborn

Date 3/20/90 Registration No. 17267

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A.M. on the 12 day of April A.D., 19 90

County Recorder Claudine Kayler
By ms, Deputy

DOCUMENT NO. 319609

Statement of Evidence:

E17 Northeast corner section 10

Cor. 10,11,2 and 3 (NE Cor. Sec. 10)

- 1872 U.S. General Land Office survey set wood post for corner the following references were noted:
Elm 5" S 11 degrees E, 24 Links (15.84 feet)
- 1922 GLO found cedar post and following references:
Cedar stump 18" N 68 degrees 45 minutes E, 32 Links
Ash 12" N 9 degrees 30 minutes W, 39 Links
Cedar stump 16" S 60 degrees 45 minutes W, 20 Links
they set a 2"x 36" iron post with brass cap and witnessed as follows:
Spruce 10" S 46 degrees 15 minutes W, 128 Links (84.48 feet)
Balsam 8" S 51 degrees 15 minutes E, 148 Links (97.68 feet)
Ash 8" N 37 degrees E, 71 Links (46.86 feet)
Ash 7" N 41 degrees W, 68 Links (44.88 feet)
- 1934 CCC notes by Brills, from USFS Remer district files, state good wood post 36" above ground. No additional information.
- 1969 U.S.F.S. found 1922 GLO monument and the following witnesses:
Elm 5" S 11 degrees E, 24 Links (stump hole)
Cedar 7" N 78 degrees E, 32 Links (stump, overgrown blaze)
Ash 5" N 16 degrees W, 40 Links (stump at bearing, & dist.)
Cedar 9" S 50 degrees W, 20 Links (stump, with axe marks)
Spruce 10" S 46 degrees 15 minutes W, 128 Links (stump hole)
Balsam 8" S 51 degrees 15 minutes E, 148 Links (stump hole)
Ash 8" N 37 degrees E, 71 Links (tree on ground)
Ash 7" N 41 degrees W, 68 Links (tree down scribe visible)
- 10-19-1989 Personnel from Kovanen & Osufsen Inc. found 1922 GLO monument in good condition and witness as follows:
Ash 6" S 74 degrees E, 12.93 feet
Balsam 4" S 15 degrees W, 14.33 feet
Balsam 3" N 64 degrees W, 9.01 feet
Aspen 10" N 8 degrees E, 25.27 feet
Set 8' long steel sign post with sign attached, East 3.85 feet

This position is traceable to the original GLO corner.