

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 11, Township 143N, Range 26W, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10-19-1989 found a 2" X 60" brass capped monument (bent)
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-19-1989 placed a 2" X 60" brass capped monument.
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

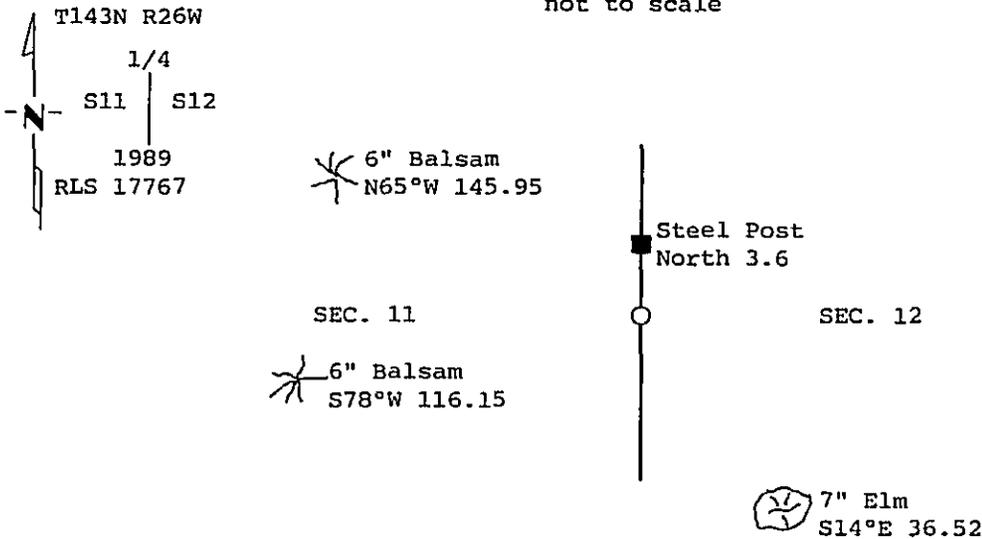

bearings are true All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 319610

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osborn
 Date 3/20/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A.M. on the 12 day of April A.D., 19 90
 County Recorder Claudine Kayler
 By m, Deputy
 DOCUMENT NO. 319610

Statement of Evidence:

G21 East quarter corner section 11

1/4 Cor. 11 and 12 (E 1/4 Cor. Sec. 11)

- 1872 U.S. General Land Office survey set wood post for corner the following references were noted:
White Pine 12" N 32 degrees W, 15 Links (9.90 feet)
Fir 4" S 45 degrees E, 20 Links (13.20 feet)
- 1916 James H. Flynn, Cass County Book C, Page 172, Survey Record No. 413, found no evidence of GLO corner, set post equidistant between corners of Section 1,2,11,12 and 11,12,13,14 and witnessed as follows:
White Pine stump 24" S 42 degrees E, 65.4 feet
Norway Pine stump 18" N 19 degrees 30 minutes W, 66.8 feet
- 1969 U.S.F.S. found the following;
White Pine stump at bearing and distance
Norway Pine stump scribing visible
they set a 5'x2" galvanized iron pipe filled with concrete with 3" brass tablet and the following references:
Elm 9" N 18 degrees W, 41.2 feet
Elm 8" S 46 degrees E, 98.7 feet
Elm 5" S 21 degrees E, 36.8 feet
Steel sign post with sign attached, West 2.2 feet
An affidavit as to location of Government corner was filed for record in the Cass County Recorders Office from the above information by William H. Okerman, RLS, on May 13, 1970.
- 10-19-1989 Personnel from Kovanen & Osufsen Inc. found 1969 USFS monument bent, (hit by logging equipment) replace with 2"x 60" brass capped iron pipe and witness as follows:
Elm 7" S 14 degrees E, 36.52 feet
Balsam 6" S 78 degrees W, 116.15 feet
Balsam 6" N 65 degrees W, 145.95 feet
Set 8' long steel sign post with sign attached, North 3.6 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.