

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 33, Township 134N., Range 31W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10/30/85 found a 2" capped iron pipe  $\pm$  5' north of the centerline of a trail east to west. It was up 3"
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

NOT TO SCALE

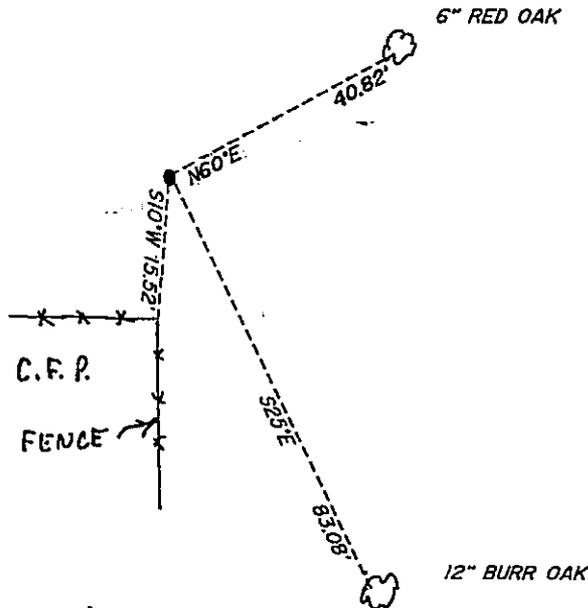

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Cass 4-15-90  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor  
 County Surveyor

319819  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:25 A.M. on the 23rd day of April, A.D., 1990

County Recorder Claudine Kaylor  
 By Bgk, Deputy  
 DOCUMENT NO. 319819

Statement of Evidence:

V-11

North Quarter Corner, Section 33, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 5" Aspen N82E 130 links and a 14" Aspen S18 $\frac{1}{2}$ E 140 links.
- 1915 County Survey Record Book "B", pages 484- 495, shows a survey by N.D. Gorman. He set the corner proportionally.
- 1985 . On October 30, Cass County Survey Technician Terry Freeman found a 2" capped iron pipe monument at a distance of about 5' north of the centerline of a trail going east to west. It was up 3". The following new bearings were marked: a Corner Fence Post S10W 15.52', a 6" Red Oak N60E 40.82', and a 12" Burr Oak S25E 83.08'.