

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 36, Township 134N., Range 31W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11/8/85 found a 8" square stone up 0.3'
DATE
 - left monument as found, lowered monument, removed monument (explain)
- On 9/17/86 placed a 1 1/2" x 21" iron pipe as a guard stake on the
DATE north side of the stone

NOT TO SCALE

SKETCH OF REFERENCE TIES

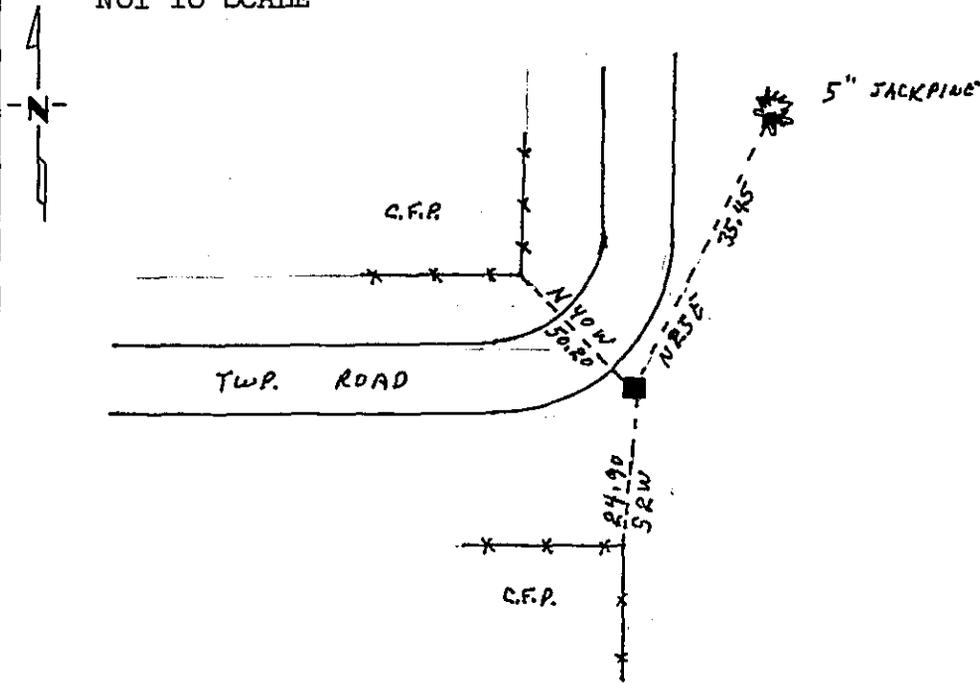

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 7-18-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

319822

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A .M. on the 23rd day of April A.D., 1990

County Recorder (Claudine) Kaylor
 By Big, Deputy
 DOCUMENT NO. 319822

Northeast Corner, Section 36, T.134N., R.31W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: an 18" Pine N10W 69 links, a 16" Pine N2E 64 links, a 20" Pine S65W 44 links, and a 10" Pine S30E 16 links.
- 1907 County Survey Record Book "A", pages 32-33, shows a survey by John Curo. He found the southeast and the southwest bearing trees and set an 8"x 8"x 36" stone. He marked the following bearing trees: an 8" Norway Pine N44-31W 41.60' and a 10" Jack Pine N74-50E 34.25'.
- 1985 On November 8, Cass County Survey Technician and backhoe operator Glen Williams found an 8" square stone at the intersection of roads north and west. The stone was flush with the ground on the south side. The north side was up 0.3'. The stone was on the west edge of a trail going south.
- 1986 On September 17, Terry Freeman marked these new bearings: a Corner Fence Post N40W 50.20', a 5" Jack Pine N25E 35.45', and a Corner Fence Post S2W 24.90'. He set a 1½"x 21" iron pipe on the north side of the stone as a guard stake.