

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 7, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/16/86 placed a 2"x 18" telespar with stamped aluminum cap down 10" in ^{DATE} centerline E-W rd in line w/old fence N and fieldline S 500'.

SKETCH OF REFERENCE TIES

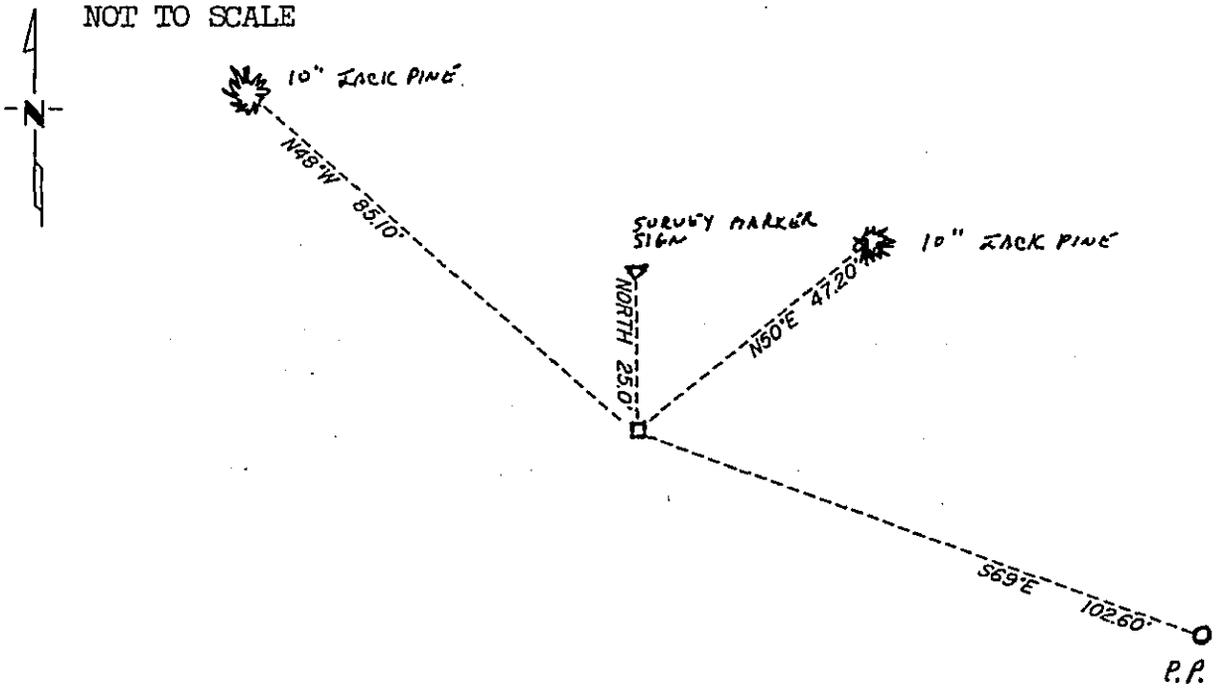

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Ann 7-18-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

319827
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:05 A .M. on the 23rd day of April A.D., 19 90

County Recorder Claudine Kayler
By bjk, Deputy

DOCUMENT NO. 319827

Statement of Evidence:

E-3

North Quarter Corner, Section 7, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 4" Aspen N70W 37 links and a 5" Tamarack S30W 49 links.
- 1986 In 1986, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in two areas. In area "A" they dug 9' north to south by 12' east to west by 2' deep. Here they found 1' of top and fill and dug into sand and sandy-loam with gravel under that. In area "B" they dug 8' north to south by 10' east to west by 1.5' deep. Here they dug .5' into top and fill and 1' into natural sand and sandy gravel.
- 1986 On October 16, Terry Freeman and Norman Morris set a 2"x 18" telespar monument with a stamped aluminum cap down 10" in the centerline of the east to west road in line with an old fence to the north and a field line approximately 500' to the south. They marked the following bearings: a 10" Jack Pine N50E 47.20', and a 10" Jack Pine N48W 85.10', a Power Pole S69E 102.60', and a Survey Marker Sign North 25.0'.