

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHWEST Corner of Section 3, Township 133N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On OCT 1989 found a 7" LENGTH OF 2" IRON PIPE ±16" BELOW SURFACE
DATE

left monument as found, lowered monument, removed monument (explain)
ON NOV. 3, 1989

On NOV. 3, 1989 placed a 2^{3/4}" ALUMINUM CAP ON A 2"x2"x36" SIGN POST
DATE
MATERIAL (STANDARD COUNTY ISSUE) CAP STAMPED ACCORDINGLY

SKETCH OF REFERENCE TIES

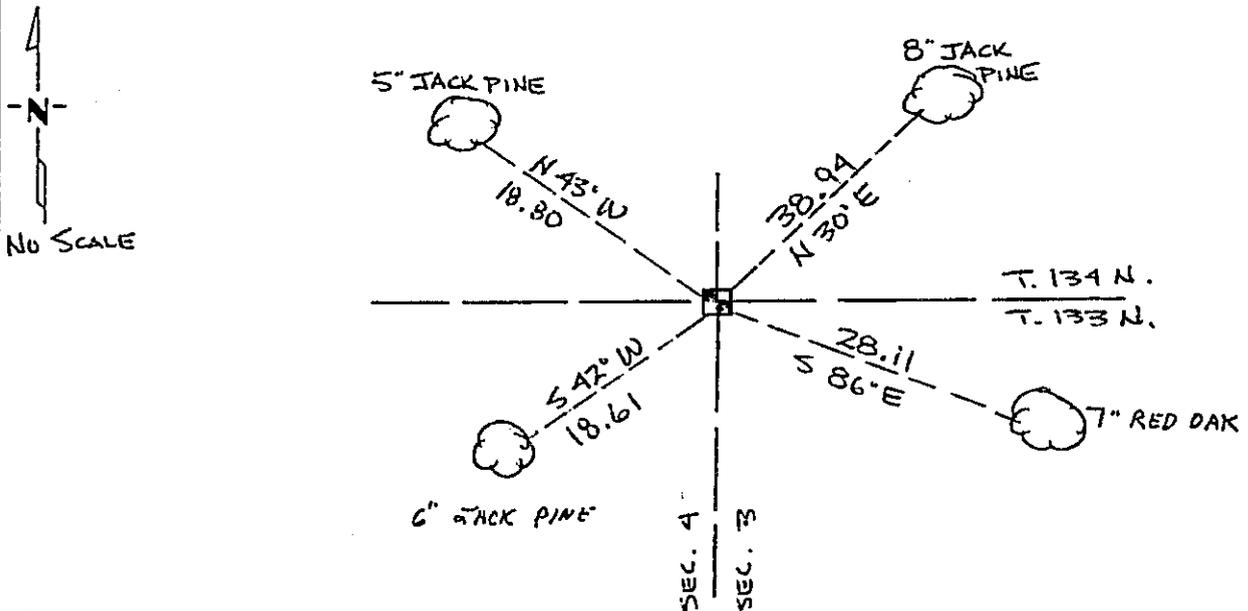

NOTE: BEARINGS TO TREES ARE TRUE.
 TREES ARE MARKED WITH DOUBLE BLAZES
 AND B.T. TAGS. DISTANCES ARE TO
 DUPLEX NAIL ON SIDE OF TREE. SIGN
 POST SET 1.0 NORTH OF MONUMENT.

Statement of evidence relative to this corner location is on back of page. 320870

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jeffrey K. Booth 5/14/1990
SIGNATURE DATE

Registration No. 19095

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:12 P. .M. on the 30 day of May A.D., 1990

County Recorder Clondine Kayler

By ms, Deputy

DOCUMENT NO. 320870

Statement of Evidence:

A-13

IN 1858 THE ORIGINAL GOV'T SURVEY SET A WOOD POST TO MARK THE CORNER.

IN 1911 JOHN CURD RECOVERS 2 ORIGINAL BEARING TREES AND PLACES A WOOD STAKE FOR CORNER, COUNTY BOOK A, PG 353-360.

IN 1942 JOHN CURD SETS 2" IRON PIPE 36" LONG FROM OLD BEARING TREES, COUNTY BOOK D, PG. 279.

OCT. 1989 JEFFREY K. BRETT RLS# 19095 RECOVERS A 7" LENGTH OF PIPE AND THE NW JACK PINE BEARING TREE (WHICH IS A DEAD STANDING TREE). RECORD DISTANCE TO SAID TREE TREE FITS VERY ~~WE~~ VERY WELL. ANGLES WERE TURNED TO OTHER B.T.'S AND OTHER 3 STUMPS WERE UNCOVERED.

NOV. 3, 1989 STANDARD COUNTY MONUMENT IS SET TO REPLACED OLD PIECE OF PIPE.