

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 11, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3-22-1990 placed a 2" X 48" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale



SEC. 2

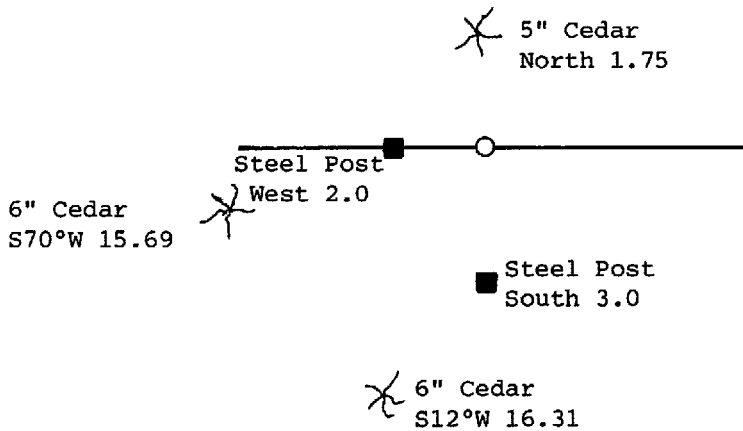

SEC. 11

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

323149

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Danpa

Date 3/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:08 P. .M. on the 28 day of August A.D., 1990

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 323149

Statement of Evidence:

E19 North quarter corner section 11

1/4 Cor. 2 and 11 (N 1/4 Cor. Sec. 11)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Tamarack 6" S 39 degrees W, 15 Links (9.90 feet)
Tamarack 5" N 70 degrees E, 10 Links (6.60 feet)
- 1969 Curt Krause, USFS, search area has been heavily burned no large trees remain, no evidence of corner, or BT's found.
- 11-6-1989 Personnel from Kovanen & Osufsen Inc. search area, find no evidence.
- 3-22-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 48" brass capped monument by single proportion measurement and on line, between the found Northwest corner of Section 11 and the reestablished Northeast corner of Section 11, then witnessed as follows:
Cedar 6" S 12 degrees W, 16.31 feet
Cedar 6" S 70 degrees W, 15.69 feet
Cedar 5" North, 1.75 feet
8' long steel sign post with sign attached, West 2.0 feet
8' long steel sign post with sign attached, South 3.0 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.