

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 12, Township 143N, Range 26W, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-3-1990 placed a 2" X 24" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
 not to scale

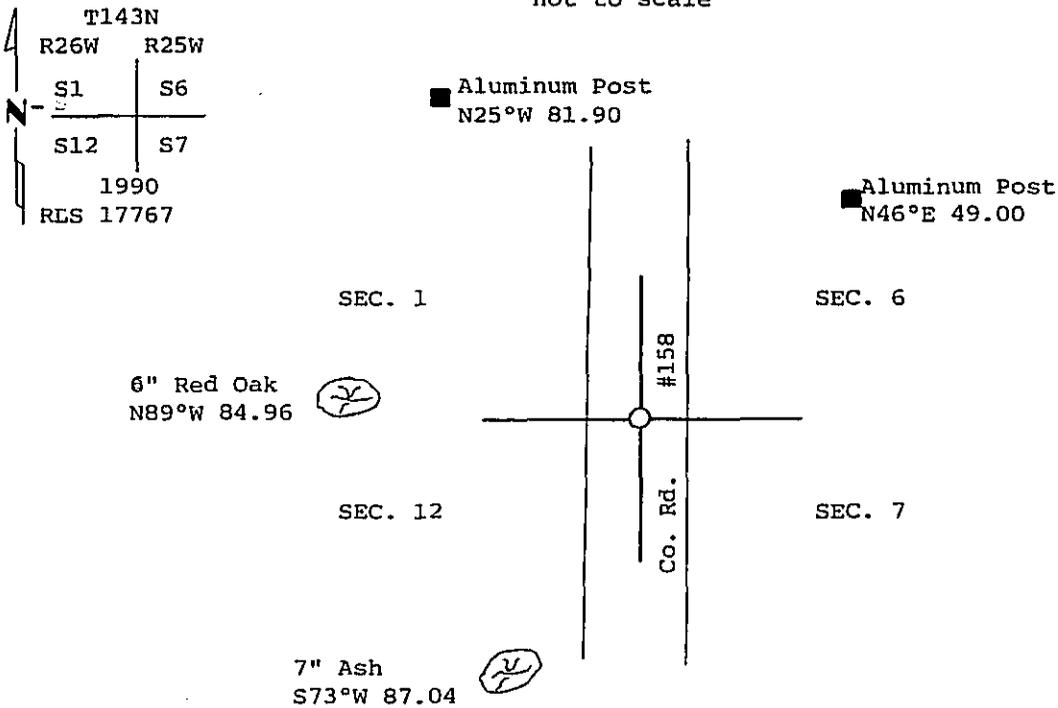

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

323152

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Dwyer
 Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:11 P. M. on the 28 day of August A.D., 19 90

County Recorder Claudine Kayser
 By M.S., Deputy

DOCUMENT NO. 323152

Statement of Evidence:

E25 Northeast corner section 12

Cor.1,12,6 and 7 (NE Cor. Sec. 12)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Spruce 8" N 6 degrees E, 7 Links (4.62 feet)
Norway Pine 16" S 47 degrees E, 20 Links (13.20 feet)
Spruce 6" S 21 degrees W, 32 Links (21.12 feet)
Aspen 14" N 73 degrees W, 27 Links (17.82 feet)
- 11-8-1965 James Ekstrom, USFS, found no evidence of corner.
- 1976 BLM dependent resurvey, found no original evidence, at proportionate distance they set a copperweld, with copper cap, 6" below surface of FS road #126 and witnessed as follows:
Aluminum Post 2.5"x 28" N 46 degrees E, 49.0 feet
Aluminum Post 2.5"x 28" N 25 degrees W, 81.9 feet
Power Pole NW with USFS tag.
- 1979 Ron Olsen, USFS, found 1976 BLM monument.
- 7-25-1989 Personnel from Kovanen & Osufsen Inc. found a 2' boulder 1' below road surface. No trace of 1976 BLM monument. The following 1976 witnesses were recovered.
Aluminum Post 2.5"x 28" N 46 degrees E, 49.00 feet
Aluminum Post 2.5"x 28" N 25 degrees W, 81.90 feet
- 5-3-1990 Personnel from Kovanen & Osufsen Inc. set a 2" X 24" monument at bearing and distance from Aluminum Post ties and add the following witnesses:
Ash 7" S 73 degrees W, 87.04 feet
Red Oak 6" N 89 degrees W, 84.96 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.