

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 15, Township 143N, Range 26W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4-27-90 placed a 2" X 54" brass capped monument
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

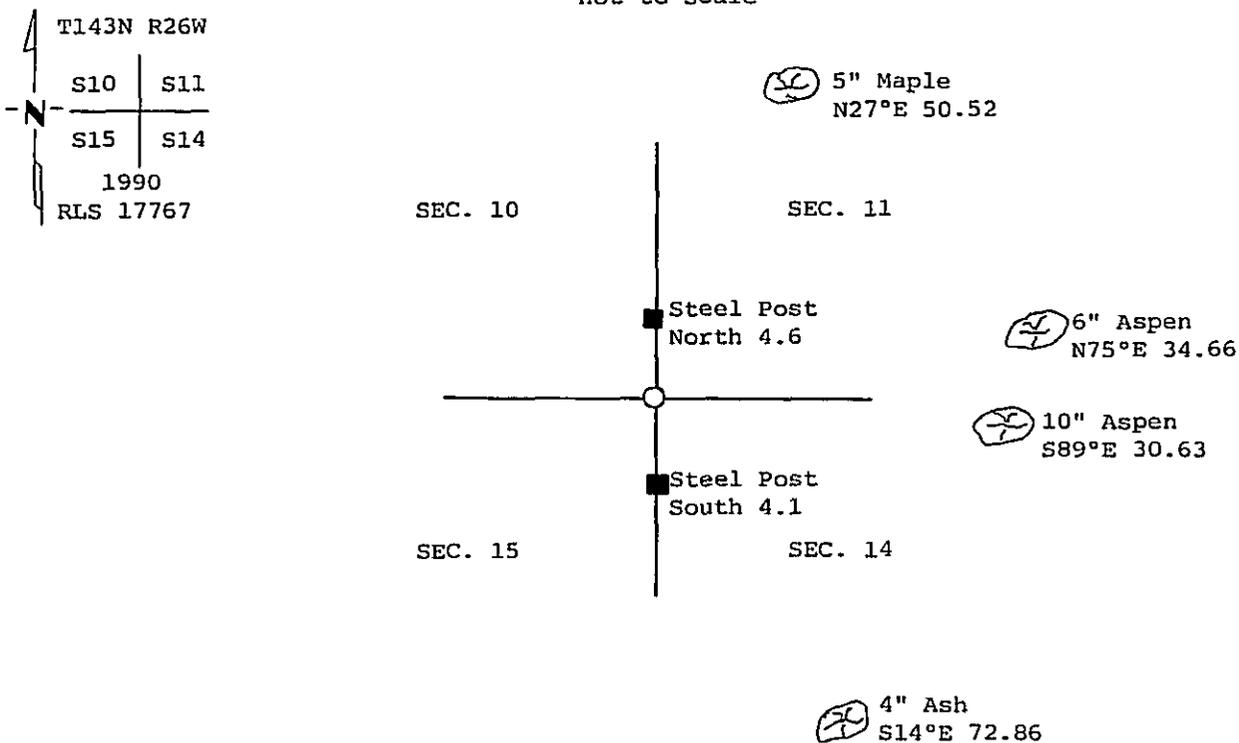

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.
 bearings are true

Statement of evidence relative to this corner location is on back of page. 323154

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Rapp
 Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:13 P.M. on the 28 day of August A.D., 19 90
 County Recorder Clondine Kayler
 By Ms, Deputy
 DOCUMENT NO. 323154

Statement of Evidence:

J17 Northeast corner section 15

Cor. 10,11,14 and 15 (NE Cor. Sec. 15)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Spruce 10" N 39 degrees E, 20 Links (13.20 feet)
Spruce 6" S 75 degrees W, 51 Links (33.66 feet)
Aspen 7" N 36 degrees W, 15 Links (9.90 feet)
Spruce 4" S 24 degrees E, 10 Links (6.60 feet)
- 9-12-1969 Curt Krause, USFS, found rotted squared post at fence corner, top of post was covered with a piece of tin that is still square shaped, no other evidence was found.
- 11-9-1989 Personnel from Kovanen & Osufsen Inc., search area is on east edge of field. Find old fence running north and south 15 feet east of new north and south fence, no evidence of the post mentioned in 1969, or BT's were found.
- 4-27-1990 Personnel from Kovanen & Osufsen Inc. made additional search of area, nothing found, set a 2" x 54" brass capped monument in lost position by double proportion method using the found north quarter corner of section 15, northeast corner of section 14, northeast corner of section 10 and the reestablished southeast corner of section 15 and mark the following witnesses:
Ash 4" S 14 degrees E, 72.86 feet
Aspen 10" S 89 degrees E, 30.63 feet
Aspen 6" N 75 degrees E, 34.66 feet
Maple 5" N 27 degrees E, 50.52 feet
Set 8' long steel sign post with sign attached, North 4.6 feet
Set 8' long steel sign post with sign attached, South 4.1 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.